# **TUNGSRAM**<sup>™</sup>

Innovation is our heritage EST. 1896





## CerMH Double Ended CMH70/TD/UVC/830/RX7s TU 93102188

# **Product information**

There is a variety of **CerMH lamp** configurations which extends the opportunities for luminaires design and light distribution. Low wattage double ended lamps can be used transversely for wide beam floodlighting.

#### Application areas





## Product data

Product Code	93102188
Light Center Length [mm]	57
Bulb Shape	Double-capped
Bulb Finish	Clear
Regulatory comment	ECODESIGN Scope 2019/2020 EU
Bulb maximum overall diameter [mm]	21
Maximum Overall Length [mm]	118
Arc Gap	7.6
Net weight per piece [g]	24
Gross weight per piece [g]	60
Operating position	Horizontal ±45°
Mercury Content [mg]	6.3
UV radiance	Exempt
RoHS compliant	Yes
Brand	Tungsram
Cap/Base	Rx7s

## Performance data

Colour Code	830
Weighted energy consumption [kWh/1000h]	74.0
Rated useful lumens [lm]	6500
Rated efficacy [lm/W]	88.6
Energy efficiency class (EEC)	G
Rated lumen maintenance factor (2000 hours)	0.791
Rated lumen maintenance factor (4000 hours)	0.738
Rated lumen maintenance factor (6000 hours)	0.707
Rated lumen maintenance factor (8000 hours)	0.653
Rated lumen maintenance factor (12000 hours)	0.653
Rated lumen maintenance factor (16000 hours)	0.631
Rated survival factor (2000 hours)	1
Rated survival factor (4000 hours)	1
Rated survival factor (6000 hours)	0.99
Rated survival factor (12000 hours)	0.78
Nominal chromaticity coordinate X	0.434
Nominal chromaticity coordinate Y	0.398
Nominal correlated colour temperature (CCT) [K]]	3000
Nominal lumens [lm]	6500
Colour Rendering Index (CRI) [Ra]	80


## Electrical data

Rated power [W]	73.4
Lamp Current [A]	1
Run-up time (sec)	<240
Starting time (sec)	< 2
Hot restart time (sec)	<300
Dimming Capability	only with specific dimmers
Dimming Capability Ballast Required	only with specific dimmers Yes
Ballast Required	Yes


## Logistic data

Shipment	Standard
DUN Code	15994100017148
EAN Code	5994100017141
Pack Quantity	12
Layer quantity	408 EUR. 540 UK
Layer quantity EUR	408
Layer quantity UK	540
Pallet quantity EUR (PC)	1632
Pallet quantity UK (PC)	2160
Outer case size	176 x 136 x 218 (mm)
Product status	Available

## Light distribution

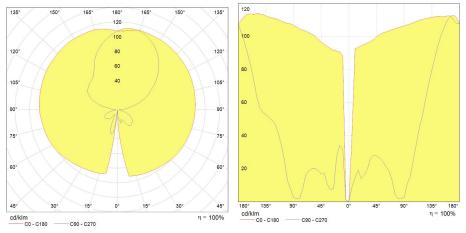


### Lumen maintenance data

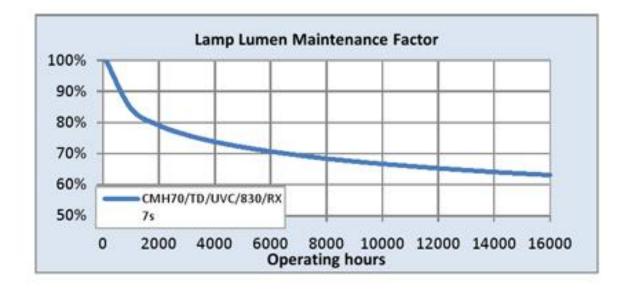

## TUNGSRAM

### Survival data

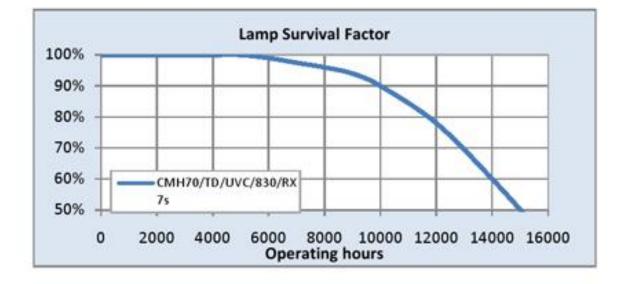

#### Downloads & Links

Go to the catalog site (HTTP) Photometry (IES) Product datasheet (PDF) High-res images / Technical drawings (HTTP)



Tungsram is a registered trademark of Tungsram Operations Kft.

tungsram.com

We in Tungsram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungsram cannot accept any liability arising from the reliance on such data to the extent permitted by law.