



MASTERCcolour CDM-TC Evolution

MASTERCcolour CDM-TC Evolution 50W/930 G8.5

Single-ended, highest-efficiency, longest-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Information

Cap-Base	G8.5 [G8.5]
Operating Position	VBU/VBD60 [Vertical or Base Up/ Base Down +/-60D]
Life To 5% Failures (Nom)	13000 h
Life To 10% Failures (Nom)	15000 h
Life To 20% Failures (Nom)	17000 h
Life To 50% Failures (Nom)	20000 h
Ansi Code HID	-

• Light Technical

Color Code	930 [CCT of 3000K]
Luminous Flux (Nom)	5700 lm
Color Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	0.430
Chromaticity Coordinate Y (Nom)	0.390
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	114 lm/W
Color Rendering Index (Min)	-
Color Rendering Index (Nom)	90

• Operating and Electrical

Power (Rated) (Nom)	50 W
---------------------	------

Lamp Current Run-Up (Max)	2 A
Ignition Peak Voltage (Max)	5000 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	102 V
Voltage (Min)	88 V
Voltage (Nom)	95 V

• Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	3.8 mg

• UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

PHILIPS

MASTERCcolour CDM-TC Evolution

• Luminaire Design Requirements

Bulb Temperature (Max)	550 °C
Pinch Temperature (Max)	300 °C

• Product Data

Full product code	871829170126200
Order product name	MASTERCcolour CDM-TC Evolution 50W/930 G8.5


EAN/UPC - Product	8718291701262
Order code	928060905131
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928060905131
Net Weight (Piece)	9.000 g

Warnings and Safety

- Use only in a totally enclosed luminaire, even during testing (IEC61167, IEC62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- The vast majority of drivers are fully compatible with CDM Evolution lamps. However, best performance is guaranteed with Philips drivers.

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- CDM Evolution lamps are designed to comply with IEC standards
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

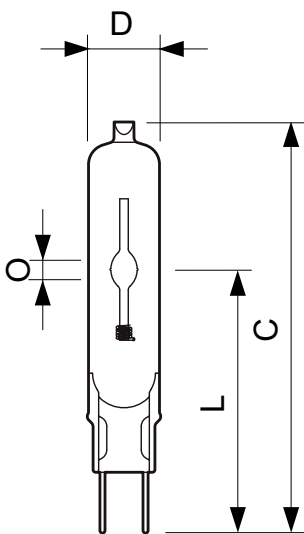


CDM-TC Evolution G8.5


CDMTC Evol 50W/930 G8.5

Product	D	O	L	L	L	C
MASTERCcolour CDM-TC Evolution 50W/930 G8.5	15 mm	7.2 mm	51 mm	53 mm	52 mm	85 mm

Dimensional drawing



Photometric data

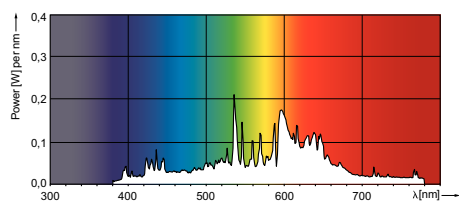

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change