



HPI-T

HPI-T 2000W/646 E40 220V CRP/4

Quartz metal halide lamps with clear outer bulb

Product data

• General Information

Cap-Base	E40 [E40]
Operating Position	P75 [Parallel +/-75D or Horizontal(HOR)]
Life To 5% Failures (Nom)	3000 h
Life To 10% Failures (Nom)	5500 h
Life To 20% Failures (Nom)	8000 h
Life To 50% Failures (Nom)	12000 h
System Description	na [-]

• Light Technical

Color Code	646 [CCT of 4600K]
Luminous Flux (Min)	182000 lm
Luminous Flux (Nom)	189000 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	60 %
Lumen Maintenance 2000 h (Nom)	77 %
Lumen Maintenance 5000 h (Nom)	67 %
Chromaticity Coordinate X (Nom)	375
Chromaticity Coordinate Y (Nom)	385
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	96 lm/W
Color Rendering Index (Nom)	65

• Operating and Electrical

Power (Rated) (Nom)	2000 W
Lamp Current Run-Up (Max)	28.4 A
Lamp Current (EM) (Nom)	16.5 A
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Time (Max)	30 s
Voltage (Max)	140 V
Voltage (Min)	120 V
Voltage (Nom)	220 V

• Controls and Dimming

Dimmable	No
----------	----

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	155 mg

• Luminaire Design Requirements

Bulb Temperature (Max)	600 °C
------------------------	--------

PHILIPS

HPI-T

Cap-Base Temperature (Max) 300 °C

• Product Data

Full product code 871150018376745
Order product name HPI-T 2000W/646 E40 220V CRP/4
EAN/UPC - Product 8711500183767


Order code 928073609231
Numerator - Quantity Per Pack 1
Numerator - Packs per outer box 4
Material Nr. (12NC) 928073609231
Net Weight (Piece) 555.000 g
ILCOS Code MT-2000/46/2B-H-E40-/H

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

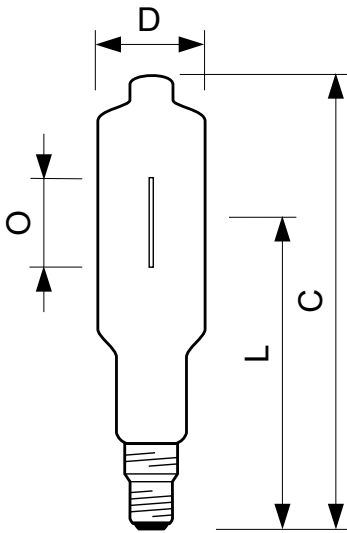


HPI-T, 1000W, E40

HPI-T 2000W/646 E40 220V

Product	D	O	L	C
HPI-T 2000W/646 E40 220V CRP/4	101.5 mm	89 mm	290 mm	430 mm



Photometric data

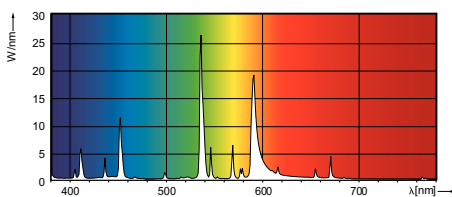



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 23
data subject to change