



MASTERColour CDM-T Elite

MASTERColour CDM-T Elite 150W/930 G12 1CT/12

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

Product data

• General Information

Cap-Base	G12 [G12]
Operating Position	P10 [Parallel +/-10D or Horizontal(HOR)]
Life To 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	10000 h
Life To 20% Failures (Nom)	11000 h
Life To 50% Failures (Nom)	12000 h
Ansi Code HID	-

• Light Technical

Color Code	930 [CCT of 3000K]
Luminous Flux (Nom)	15000 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	95 %
Lumen Maintenance 12000 h (Nom)	73 %
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	91 %
Lumen Maintenance 4000 h (Nom)	86 %
Lumen Maintenance 5000 h (Nom)	84 %
Chromaticity Coordinate X (Nom)	0.443
Chromaticity Coordinate Y (Nom)	0.391

Correlated Color Temperature (Nom)	2800 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color Rendering Index (Min)	89
Color Rendering Index (Nom)	92

• Operating and Electrical

Power (Rated) (Nom)	150 W
Lamp Current Run-Up (Max)	2.5 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	86 V
Voltage (Nom)	92 V

• Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

PHILIPS

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	9.5 mg

• UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

• Luminaire Design Requirements

Bulb Temperature (Max)	650 °C
Cap-Base Temperature (Max)	280 °C

Pinch Temperature (Max) 350 °C

• Product Data


Full product code	871150021312915
Order product name	MASTERColour CDM-T Elite 150W/930 G12 1CT/12
EAN/UPC - Product	8711500213129
Order code	928094705125
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928094705125
Net Weight (Piece)	0.031 kg
ILCOS Code	MT/UB-150/930-H-G12-21/100

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

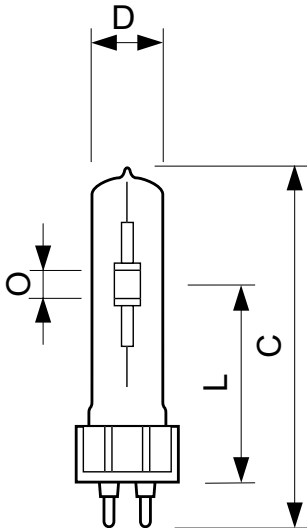


CDM-T Elite 150W /930


CDM-T Elite 150W/930 G12

Product	D	O	L	L	L	C
MASTERColour CDM-T Elite 150W/930 G12 1CT/12	20 mm	9 mm	55 mm	57 mm	56 mm	110 mm

Dimensional drawing



Photometric data

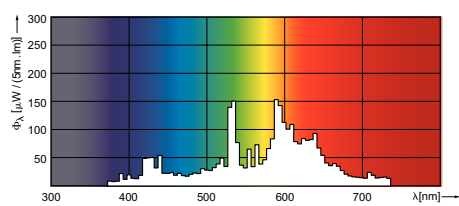

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change