

MasterColor CDM-Tm Elite Mini GU6.5

MASTERC CDM-Tm Elite Mini 35W/930 GU6.5

The Mini MasterColor CDM-Tm is ideal for smaller luminaires, perfect for a minimalist design. The Mini MasterColor lamp and ballast system lasts longer than standard halogen PAR38 lamps and consumes less energy. The 'system' includes the MiniMasterColor 3000K lamp, the eVision electronic ballast and a twist & lock lamp base. This system design is ideal for accent and display lighting in specialty retail and architectural outdoor applications.

Product data

• General Information

Cap-Base	GU6.5 [GU6.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	12000 h
Life To 10% Failures (Nom)	14000 h
Life To 20% Failures (Nom)	16000 h
Life To 50% Failures (Nom)	20000 h
Ansi Code HID	C130/E

• Light Technical

Color Code	930 [CCT of 3000K]
Luminous Flux (Min)	3600 lm
Luminous Flux (Nom)	4000 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	95 %
Lumen Maintenance 12000 h (Nom)	80 %
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 4000 h (Nom)	90 %
Chromaticity Coordinate X (Nom)	0.435
Chromaticity Coordinate Y (Nom)	0.396
Correlated Color Temperature (Nom)	2950 K
Luminous Efficacy (rated) (Nom)	102 lm/W

Color Rendering Index (Min)	87
Color Rendering Index (Nom)	90

• Operating and Electrical

Power (Rated) (Nom)	35 W
Lamp Current Run-Up (Max)	1 A
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	95 V
Voltage (Min)	79 V
Voltage (Nom)	87 V

• Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	4.7 mg

PHILIPS

MasterColor CDM-Tm Elite Mini GU6.5

• UV

Pet (Niosh) (Min) 8 h/500lx
Damage Factor D/fc (Max) 0.4

• Luminaire Design Requirements

Bulb Temperature (Max) 450 °C
Cap-Base Temperature (Max) 250 °C

• Product Data


Order product name MASTERC CDM-Tm Elite Mini 35W/930 GU6.5
EAN/UPC - Product 046677418793
Order code 928187405115
Numerator - Quantity Per Pack 1
Numerator - Packs per outer box 12
Material Nr. (12NC) 928187405115
Net Weight (Piece) 0.008 kg
ILCOS Code MT/UB-35/930-H-GU6.5-13.3/52

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will

remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)


Dimensional drawing

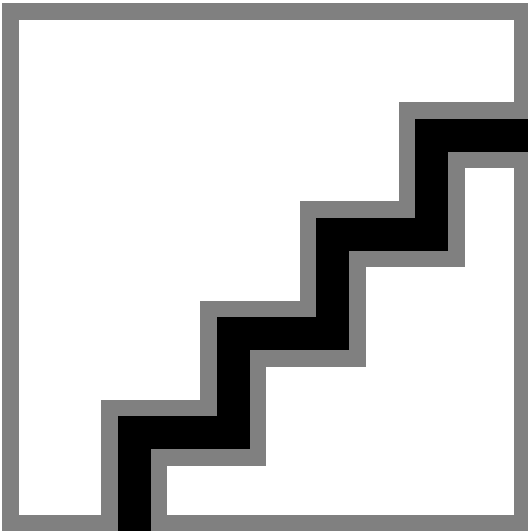


MASTER Colour CDM-Tm 20W /830 GU6,5

CDM-Tm 35W/930 GU6.5

Product	D	D	O	L	L	L	C
MASTERC CDM-Tm Elite Mini 35W/930 GU6.5	13.3 mm	0.5 in	4.7 mm	28 mm	32 mm	30 mm	56.7 mm



Photometric data

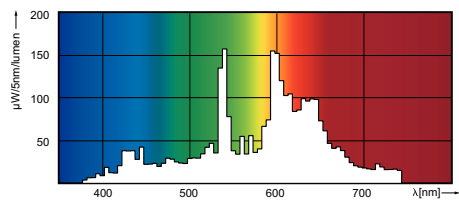

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, November 29
data subject to change