



MASTER HPI-T Plus

MASTER HPI-T Plus 250W/645 E40 1SL/12

Quartz metal halide lamps with clear outer bulb

Product data

• General Information

Cap-Base	E40 [E40]
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]
Life To 5% Failures (Nom)	5000 h
Life To 10% Failures (Nom)	7500 h
Life To 20% Failures (Nom)	11000 h
Life To 50% Failures (Nom)	20000 h
System Description	Horizontal [Horizontal Operating Position]

• Light Technical

Color Code	645 [CCT of 4500K]
Luminous Flux (Min)	18500 lm
Luminous Flux (Nom)	20500 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	70 %
Lumen Maintenance 2000 h (Min)	75 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 20000 h	60 %
Lumen Maintenance 5000 h (Min)	65 %
Lumen Maintenance 5000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	365

Chromaticity Coordinate Y (Nom)	377
Correlated Color Temperature (Nom)	4500 K
Luminous Efficacy (rated) (Nom)	84 lm/W
Color Rendering Index (Nom)	65

• Operating and Electrical

Power (Rated) (Nom)	245 W
Lamp Current Run-Up (Max)	3.9 A
Lamp Current (EM) (Nom)	2.1 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	560 V
Ignition Supply Voltage (Min)	198 V
Ignition Time (Max)	10 s
Voltage (Max)	138 V
Voltage (Min)	118 V
Voltage (Nom)	128 V

• Controls and Dimming

Dimmable	No
----------	----

• Mechanical and Housing

Bulb Finish	Clear
-------------	-------

PHILIPS

MASTER HPI-T Plus

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	36 mg

• Luminaire Design Requirements

Bulb Temperature (Max)	550 °C
Cap-Base Temperature (Max)	250 °C

• Product Data


Full product code	871150017989015
Order product name	MASTER HPI-T Plus 250W/645 E40 1SL/12
EAN/UPC - Product	8711500179890
Order code	928481300098
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928481300098
Net Weight (Piece)	0.190 kg

Warnings and Safety


- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury or sodium lamps

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

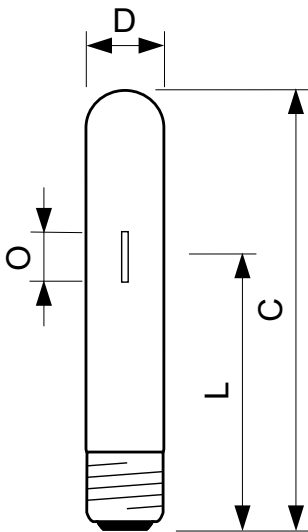


HPI-T Plus, E39/E40



HPI-T Plus 250W/645 E40

Product	D	O	L	C
MASTER HPI-T Plus 250W/645 E40 1SL/12	47 mm	29 mm	155 mm	255 mm

Photometric data

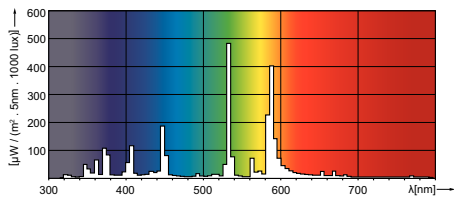

© 2016 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, January 12
data subject to change