PHILIPS Lighting

MASTER TL5 High Efficiency

MASTER TL5 HE 14W/865 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

865 [CCT of 6500K]

1250 lm

1125 lm

91 lm/W

6500 K

80 lm/W

Cool Daylight

Product data

Light Technical Color Code

Luminous Flux (Nom) Luminous Flux (Rated) (Nom)

Color Designation

General Information			
Cap-Base	G5 [G5]		
Life to 50% Failures Preheat (Nom)	24000 h		
Features	na [Not Applicable]		
System Description	High Efficiency		
LSF Preheat 2000 h Rated	99 %		
LSF Preheat 4000 h Rated	99 %		
LSF Preheat 6000 h Rated	99 %		
LSF Preheat 8000 h Rated	99 %		
LSF Preheat 16000 h Rated	97 %		
LSF Preheat 20000 h Rated	84 %		

Color Rendering Index (Nom)	82	
LLMF 2000 h Rated	96 %	
LLMF 4000 h Rated	95 %	
LLMF 6000 h Rated	94 %	
LLMF 8000 h Rated	93 %	
LLMF 12000 h Rated	92 %	
LLMF 16000 h Rated	91 %	
LLMF 20000 h Rated	90 %	
Operating and Electrical		
Power (Nom)	14 W	
Lamp Current (Nom)	0.165 A	
Temperature		
Design Temperature (Nom)	35 °C	

Color Rendering Index (Max) Color Rendering Index (Min)

85

80

Luminous Efficacy (@ Max Lumen, Rated) (Nom)

Correlated Color Temperature (Nom)

Luminous Efficacy (rated) (Nom)


MASTER TL5 High Efficiency

Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Cap-Base Information	Green Plate		
Approval and Application			
Energy Efficiency Label (EEL)	A+		
Mercury (Hg) Content (Nom)	1.4 mg		
Energy Consumption kWh/1000 h	15 kWh		
Product Data			
Full product code	871150071009355		

Order product name	MASTER TL5 HE 14W/865 SLV/40		
EAN/UPC - Product	8711500710093		
Order code	927926086555		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	40		
Material Nr. (12NC)	927926086555		
Net Weight (Piece)	52.000 g		
ILCOS Code	FDH-14/65/1B-L/P-G5-16/550		


Warnings and Safety

Dimensional drawing

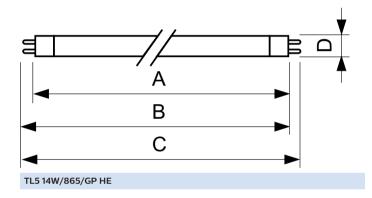



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 14W/865	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm
SLV/40					

Photometric data

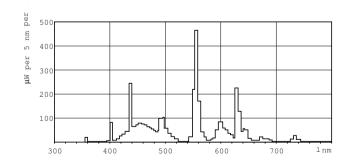


LDPB_TL5-HE8_865-Spectral power distribution B/W

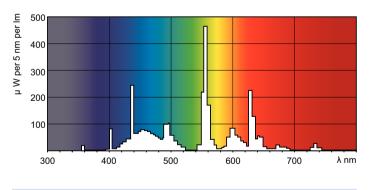




MASTER TL5 High Efficiency

Lifetime

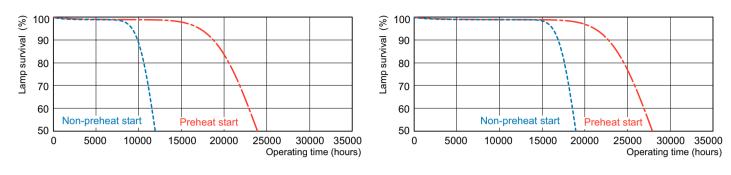

LDLE_TL5-HE8_0002-Life expectancy diagram

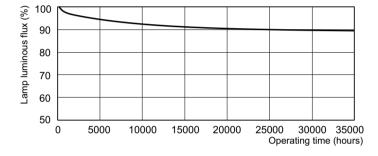



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2019, December 13 - data subject to change