



TL-M Rapid Start Standard Colours

TL-M RS 20W/33-640 SLV/25

The TL-M RS (Rapid Start) lamp (tube diameter 38 mm) has an external silicon coating and an external ignition strip. It is suitable for situations where low temperatures and high humidity require fast and stable ignition but color rendering is not important. Rapid Start lamps can be ignited without a starter.

Product data


General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	13000 h
System Description	Rapid Start
Light Technical	
Color Code	33-640
Luminous Flux (Nom)	1200 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	81 %
Correlated Color Temperature (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	62 lm/W
Color Rendering Index (Nom)	63
Operating and Electrical	
Power (Nom)	19.3 W
Lamp Current (Nom)	0.37 A
Voltage (Nom)	57 V

Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	8.0 mg
Energy Consumption kWh/1000 h	24 kWh

Product Data	
Full product code	871150072372740
Order product name	TL-M RS 20W/33-640 SLV/25
EAN/UPC - Product	8711500723727
Order code	928030003371
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928030003371
Net Weight (Piece)	137.800 g
ILCOS Code	FD-20/41/2B-LC/P-G13

TL-M Rapid Start Standard Colours

Dimensional drawing




Product


TL-M RS 20W/33-640 SLV/25

TL-M 20W/33-640 RS

Photometric data

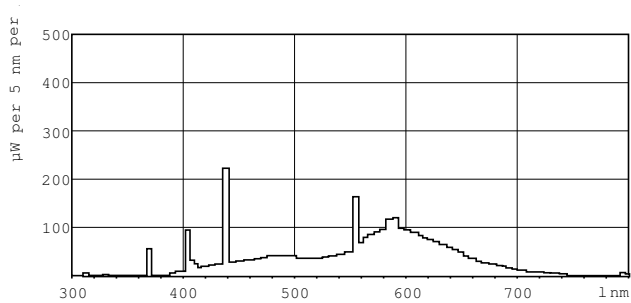

LDPB_TL-M-RS_33-640-Spectral power distribution B/W

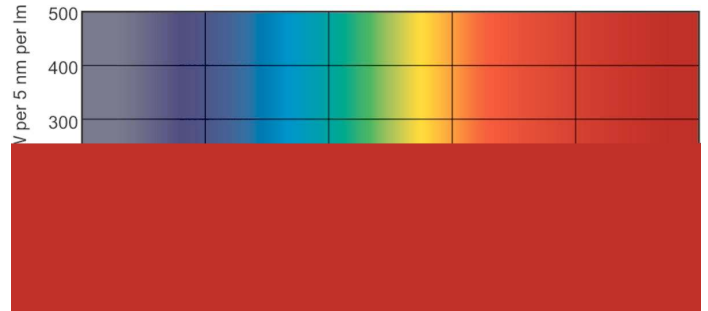

LDPO_TL-M-RS_33-640-Spectral power distribution Colour

