



# MASTER TL-D 90 De Luxe

# MASTER TL-D 90 De Luxe 36W/965 SLV/10

This TL-D lamp makes colors appear rich, deep and enhanced in a natural way. Thus very suitable for applications where a high color recognition is needed: first aid and treatment rooms in hospitals, printing rooms, jewelry, dentists, hairdressing, museums and shops

#### **Warnings and Safety**

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

| General Information                |                                  |  |  |  |  |
|------------------------------------|----------------------------------|--|--|--|--|
| Cap-Base                           | G13 [ Medium Bi-Pin Fluorescent] |  |  |  |  |
| Life To 10% Failures (Nom)         | 12000 h                          |  |  |  |  |
| Life to 50% Failures (Nom)         | 15000 h                          |  |  |  |  |
| Life to 50% Failures Preheat (Nom) | 20000 h                          |  |  |  |  |
| LSF 2000 h Rated                   | 99 %                             |  |  |  |  |
| LSF 4000 h Rated                   | 99 %                             |  |  |  |  |
| LSF 6000 h Rated                   | 99 %                             |  |  |  |  |
| LSF 8000 h Rated                   | 99 %                             |  |  |  |  |
| LSF 12000 h Rated                  | 89 %                             |  |  |  |  |
| LSF 16000 h Rated                  | 33 %                             |  |  |  |  |
| LSF 20000 h Rated                  | 2 %                              |  |  |  |  |
|                                    |                                  |  |  |  |  |
| Light Technical                    |                                  |  |  |  |  |
| Color Code                         | 965 [ CCT of 6500K]              |  |  |  |  |
| Luminous Flux (Nom)                | 2800 lm                          |  |  |  |  |

| Luminous Flux (Rated) (Nom)        | 2800 lm       |  |  |
|------------------------------------|---------------|--|--|
| Color Designation                  | Cool Daylight |  |  |
| Chromaticity Coordinate X (Nom)    | 309           |  |  |
| Chromaticity Coordinate Y (Nom)    | 322           |  |  |
| Correlated Color Temperature (Nom) | 6500 K        |  |  |
| Luminous Efficacy (rated) (Nom)    | 77.8 lm/W     |  |  |
| Color Rendering Index (Nom)        | 93            |  |  |
| LLMF 2000 h Rated                  | 96 %          |  |  |
| LLMF 4000 h Rated                  | 95 %          |  |  |
| LLMF 6000 h Rated                  | 94 %          |  |  |
| LLMF 8000 h Rated                  | 93 %          |  |  |
| LLMF 12000 h Rated                 | 92 %          |  |  |
| LLMF 16000 h Rated                 | 91 %          |  |  |
| LLMF 20000 h Rated                 | 90 %          |  |  |
|                                    |               |  |  |


Datasheet, 2020, October 15 data subject to change

# **MASTER TL-D 90 De Luxe**

| Operating and Electrical      |         |
|-------------------------------|---------|
| Power (Nom)                   | 36.0 W  |
| Lamp Current (Nom)            | 0.440 A |
|                               |         |
| Temperature                   |         |
| Design Temperature (Nom)      | 25 ℃    |
|                               |         |
| Controls and Dimming          |         |
| Dimmable                      | Yes     |
|                               |         |
| Approval and Application      |         |
| Energy Efficiency Label (EEL) | A       |
| Mercury (Hg) Content (Nom)    | 2 mg    |
| Energy Consumption kWh/1000 h | 43 kWh  |
|                               | -       |

| Product Data                    |                                       |  |  |  |
|---------------------------------|---------------------------------------|--|--|--|
| Full product code               | 871150088862425                       |  |  |  |
| Order product name              | MASTER TL-D 90 De Luxe 36W/965 SLV/10 |  |  |  |
| EAN/UPC - Product               | 8711500888624                         |  |  |  |
| Order code                      | 928044596581                          |  |  |  |
| Numerator - Quantity Per Pack   | 1                                     |  |  |  |
| Numerator - Packs per outer box | 10                                    |  |  |  |
| Material Nr. (12NC)             | 928044596581                          |  |  |  |
| Net Weight (Piece)              | 135.000 g                             |  |  |  |
| ILCOS Code                      | FD-36/65/1A-E-G13                     |  |  |  |
|                                 |                                       |  |  |  |


## Dimensional drawing





| Product             | D (max) | A (max)   | B (max)   | B (min)   | C (max)   |
|---------------------|---------|-----------|-----------|-----------|-----------|
| MASTER TL-D 90 De   | 28 mm   | 1199.4 mm | 1206.5 mm | 1204.1 mm | 1213.6 mm |
| Luxe 36W/965 SLV/10 |         |           |           |           |           |

## TL-D De Luxe 36W/965

## Photometric data

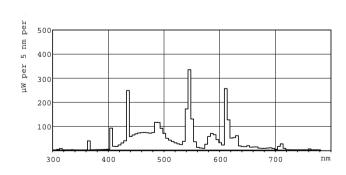




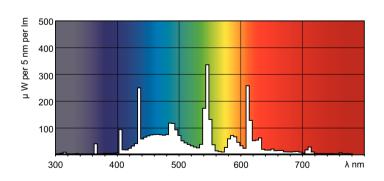


LDPO\_TL-D9HLm\_965-Spectral power distribution Colour


## **MASTER TL-D 90 De Luxe**


#### Lifetime

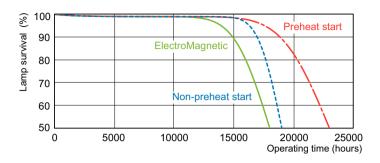

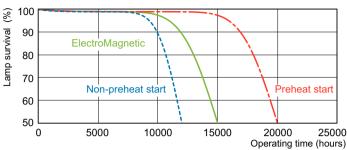

LDLE\_TL-D9HLm\_0002-Life expectancy diagram



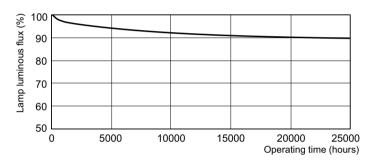

LDLM\_TL-D9HLm\_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.