



TUV T8

TUV 75W HO 1SL/6

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.

Product data


General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Disinfection
Useful Life (Nom)	9000 h
System Description	High Output
Light Technical	
Color Code	TUV
Color Designation	- [Not Specified]
Depreciation at Useful Lifetime	10 %
Operating and Electrical	
Power (Nom)	75 W
Lamp Current (Nom)	0.84 A

Voltage (Nom)	110 V
Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg
UV	
UV-C Radiation at 100 hr	25.5 W
Product Data	
Full product code	87115006185110
Order product name	TUV 75W HO 1SL/6
EAN/UPC - Product	8711500618511
Order code	928049404003
Numerator - Quantity Per Pack	1

TUV T8

Numerator - Packs per outer box	6
Material Nr. (12NC)	928049404003
Net Weight (Piece)	135.000 g



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV 75W HO 1SL/6	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TUV TL-D 75W HO

Photometric data

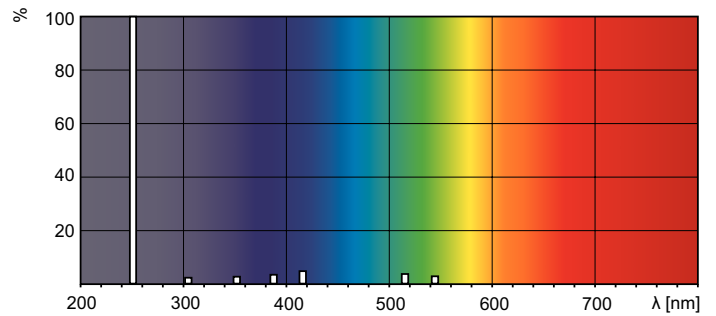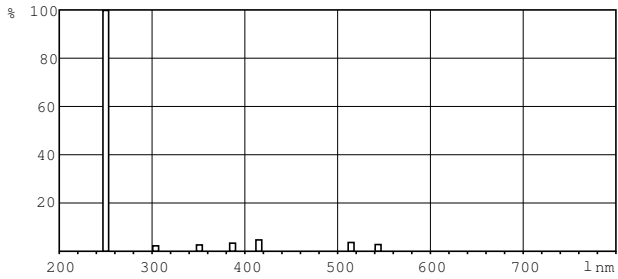

XDPB_XUTUVTLD-Spectral power distribution B/W

XDPO_XUTUVTLD-Spectral power distribution Colour

