



MASTERColour CDM-TP

MASTERColour CDM-TP 70W/830 PG12-2 1CT/12

Range of protected, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light to be used in open luminaires

Warnings and Safety

- Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Correlated Color Temperature (Nom)	
Cap-Base	PG12-2 [PG12-2]	Correlated Color Temperature (Nom)	3000 K
Operating Position	UNIVERSAL [Any or Universal (U)]	Luminous Efficacy (rated) (Nom)	82 lm/W
Life to 5% Failures (Nom)	9000 h	Color Rendering Index (Nom)	80
Life to 20% Failures (Nom)	13000 h	Operating and Electrical	
Life to 50% Failures (Nom)	16000 h	Power (Nom)	73.2 W
Light Technical		Lamp Current Run-Up (Max)	1.4 A
Color Code	830 [CCT of 3000K]	Lamp Current (EM) (Nom)	0.98 A
Luminous Flux (Rated) (Nom)	6000 lm	Ignition Peak Voltage (Max)	5000 V
Color Designation	Warm White (WW)	Ignition Supply Voltage (Min)	198 V
Lumen Maintenance 10000 h (Nom)	65 %	Re-Ignition Time (Min) (Max)	15 min
Lumen Maintenance 2000 h (Nom)	80 %	Ignition Time (Max)	30 s
Lumen Maintenance 5000 h (Nom)	70 %	Voltage (Max)	98 V
Chromaticity Coordinate X (Nom)	428	Voltage (Min)	82 V
Chromaticity Coordinate Y (Nom)	401	Voltage (Nom)	90 V

MASTERC colour CDM-TP

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

Mechanical and Housing

Bulb Finish	Clear
-------------	-------

Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	5.2 mg
Energy Consumption kWh/1000 h	81 kWh

UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

Luminaire Design Requirements

Bulb Temperature (Max)	400 °C
Cap-Base Temperature (Max)	210 °C

Product Data

Full product code	871150020127015
Order product name	MASTERC colour CDM-TP 70W/830 PG12-2 1CT/12
EAN/UPC - Product	8711500201270
Order code	928086909230
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928086909230
Net Weight (Piece)	72.000 g
ILCOS Code	MTS/UB-70/830-H-PG12-2-32/149


Dimensional drawing

D

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERC colour CDM-TP 70W/830 PG12-2 1CT/12	32.00 mm	7 mm	89 mm	93 mm	91 mm	149 mm

CDM-TP 70W/830 PG12-2

Photometric data

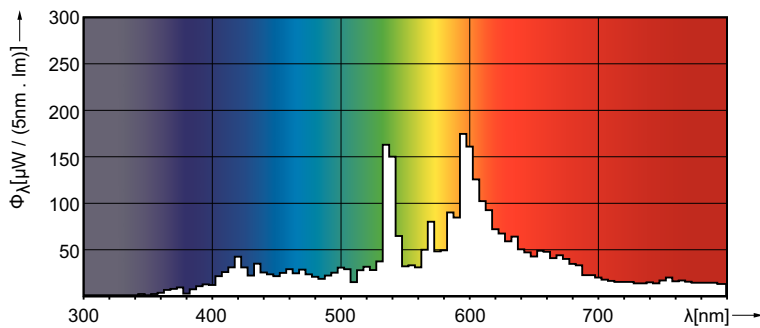

LDPO_CDM-TP_830-Spectral power distribution Colour

MASTERC colour CDM-TP

Lifetime

