



# MASTERColour CDM-T Elite

## MASTERColour CDM-T Elite 150W/930 G12 1CT/12

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information			
Cap-Base	G12 [ G12]	Lumen Maintenance 12000 h (Nom)	73 %
Operating Position	P10 [ Parallel +/-10D or Horizontal(HOR)]	Lumen Maintenance 10000 h (Nom)	75 %
Life to 5% Failures (Nom)	9000 h	Lumen Maintenance 2000 h (Nom)	91 %
Life To 10% Failures (Nom)	10000 h	Lumen Maintenance 4000 h (Nom)	86 %
Life to 20% Failures (Nom)	11000 h	Lumen Maintenance 5000 h (Nom)	84 %
Life to 50% Failures (Nom)	12000 h	Chromaticity Coordinate X (Nom)	0.443
ANSI Code HID	-	Chromaticity Coordinate Y (Nom)	0.391
		Correlated Color Temperature (Nom)	3000 K
		Luminous Efficacy (rated) (Nom)	98 lm/W
		Color Rendering Index (Min)	89
		Color Rendering Index (Nom)	92
Light Technical		Operating and Electrical	
Color Code	930 [ CCT of 3000K]	Power (Nom)	150.1 W
Luminous Flux (Rated) (Nom)	14600 lm		
Color Designation	Warm White (WW)		
Lumen Maintenance 1000 h (Nom)	95 %		

# MASTERCcolour CDM-T Elite

Lamp Current Run-Up (Max)	2.5 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	86 V
Voltage (Nom)	92 V

## Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

## Mechanical and Housing

Bulb Finish	Clear
-------------	-------

## Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	9.5 mg
Energy Consumption kWh/1000 h	164 kWh

## UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3


## Luminaire Design Requirements

Bulb Temperature (Max)	650 °C
Cap-Base Temperature (Max)	280 °C
Pinch Temperature (Max)	350 °C

## Product Data

Full product code	871150021312915
Order product name	MASTERCcolour CDM-T Elite 150W/930 G12 1CT/12
EAN/UPC - Product	8711500213129
Order code	928094705125
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928094705125
Net Weight (Piece)	0.031 kg
ILCOS Code	MT/UB-150/930-H-G12-21/100

## Dimensional drawing






CDM-T Elite 150W/930 G12

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-T Elite 150W/930 G12 1CT/12	20 mm	9 mm	55 mm	57 mm	56 mm	110 mm



# MASTERCoulour CDM-T Elite

## Photometric data

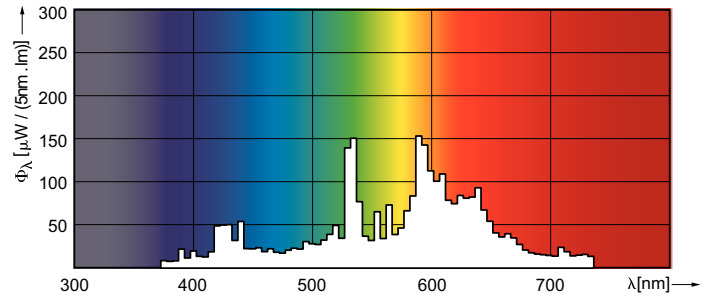

LDPO\_CDM-T-E\_150W\_930-Spectral power distribution Colour

## Lifetime

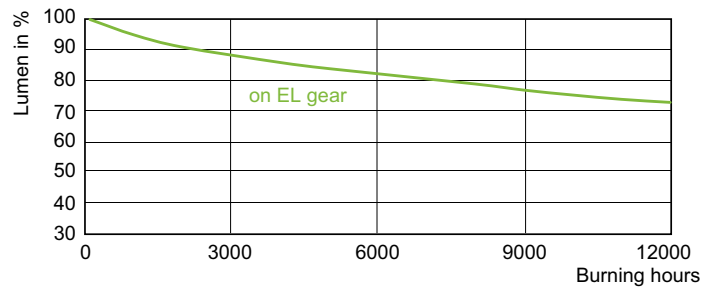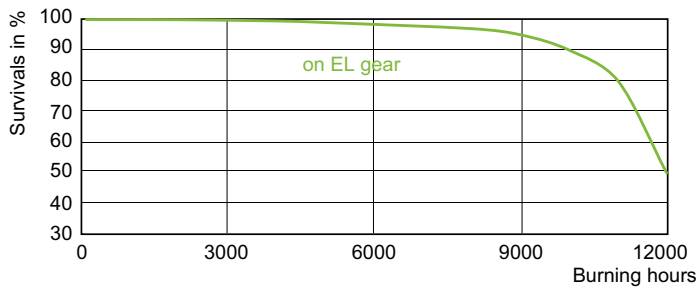

LDLE\_CDM-T-E\_150W\_930-Life expectancy diagram

