



# MSR Hot Restrike

## MSR 250 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

### Product data


| GeniPubl                           |                                   |
|------------------------------------|-----------------------------------|
| Cap-Base                           | GZY9.5 [ GZY9.5]                  |
| Operating Position                 | UNIVERSAL [ Any or Universal (U)] |
| Main Application                   | TV/Film/Studio                    |
| Life to 50% Failures (Nom)         | 750 h                             |
| System Description                 | Hot Restrike                      |
| LittPubl                           |                                   |
| Color Code                         | - [ Not Specified]                |
| Luminous Flux (Min)                | 18500 lm                          |
| Luminous Flux (Nom)                | 20000 lm                          |
| Chromaticity Coordinate X (Nom)    | 309                               |
| Chromaticity Coordinate Y (Nom)    | 320                               |
| Correlated Color Temperature (Nom) | 6000 K                            |
| Luminous Efficacy (rated) (Nom)    | 80 lm/W                           |
| Color Rendering Index (Nom)        | 90                                |
| ElecPubl                           |                                   |
| Power (Nom)                        | 250 W                             |
| Lamp Current (Nom)                 | 2.6 A                             |

| Ignition Supply Voltage (Min)   | 198 V            |
|---------------------------------|------------------|
| CntrPubl                        |                  |
| Dimmable                        | No               |
| MechPubl                        |                  |
| Cap-Base Information            | -                |
| LDRPubl                         |                  |
| Bulb Temperature (Max)          | 650 °C           |
| Pinch Temperature (Max)         | 350 °C           |
| ProductPubl                     |                  |
| Full product code               | 871869641602000  |
| Order product name              | MSR 250 HR 1CT/4 |
| EAN/UPC - Product               | 8718696416020    |
| Order code                      | 928175605115     |
| Numerator - Quantity Per Pack   | 1                |
| Numerator - Packs per outer box | 4                |
| Material Nr. (12NC)             | 928175605115     |
| Net Weight (Piece)              | 32.000 g         |

# MSR Hot Restrike

## Warnings and Safety

## Dimensional drawing





MSR 250 HR

### Product

MSR 250 HR 1CT/4

## Photometric data

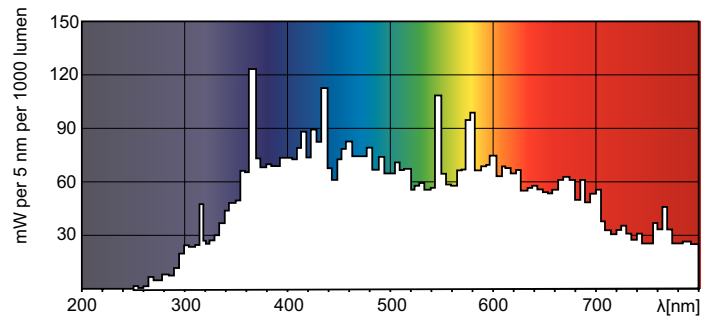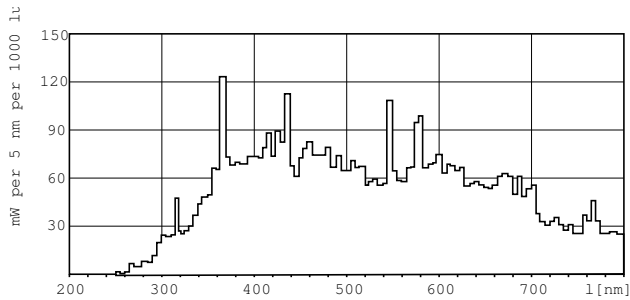

XDPO\_XDMSR\_HR\_--Spectral power distribution Colour

