



# CorePro LED tube Universal T8

## CorePro LEDtube UN 1500mm HO 23W840 T8

The new Philips CorePro LEDtube Universal T8 brings simplicity to your lighting project. You don't need to pay attention to the driver technology anymore. Thanks to a unique design, Philips CorePro LEDtube Universal T8 directly fits in luminaires operating either on Electro Magnetic ballasts or HF Electronic ballasts or mains power connection. So simple to operate and no need to carry double stock of products! Perfectly safe, reliable & easy to install Philips CorePro LEDtube Universal T8 is the ideal alternative to standard fluorescent tubes to save energy and lower investment.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	30000 h
Switching Cycle	50000X

Light Technical	
Color Code	840 [ CCT of 4000K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	2700 lm
Correlated Color Temperature (Nom)	4000 K
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz

Power (Nom)	23 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.97
Voltage (Nom)	220-240 V

Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	65 °C

Controls and Dimming	
Dimmable	No

# CorePro LED tube Universal T8

## Mechanical and Housing

Bulb Material	Glass
Product Length	1500 mm


## Approval and Application

Energy Efficiency Label (EEL)	A+
Energy Saving Product	Yes
Approval Marks	TUV CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	23 kWh

## Product Data

Full product code	871869680174100
Order product name	CorePro LEDtube UN 1500mm HO 23W840 T8
EAN/UPC - Product	8718696801741
Order code	929001869602
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001869602
Net Weight (Piece)	0.450 kg


## Dimensional drawing

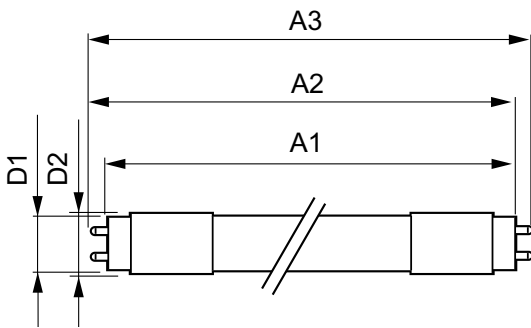


TLED 1500mm UNV24W-54W 3100lm 4000K

Product	D1	D2	A1	A2	A3
CorePro LEDtube UN 1500mm HO 23W840 T8	27.9 mm	28 mm	1500 mm	1505.9 mm	1514.2 mm

## Photometric data

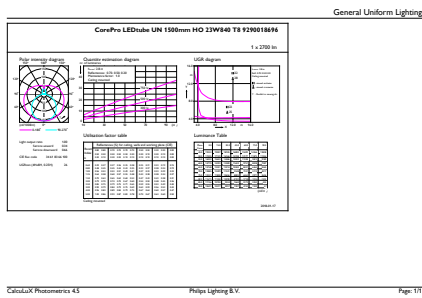

23W G13 840 4000K

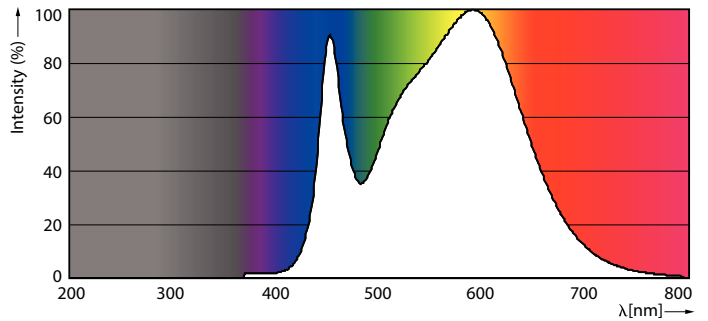

18W G13


# CorePro LED tube Universal T8

## Photometric data




18W G13 830 3000K

## Lifetime

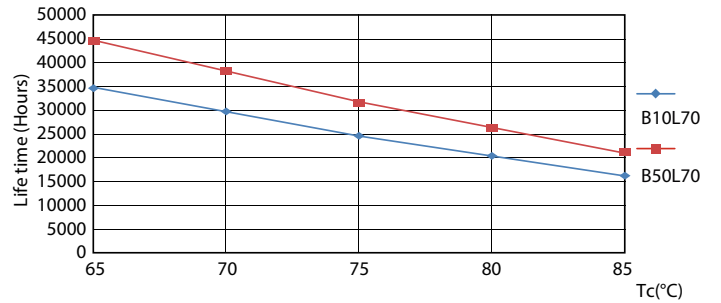

18W G13

18W G13

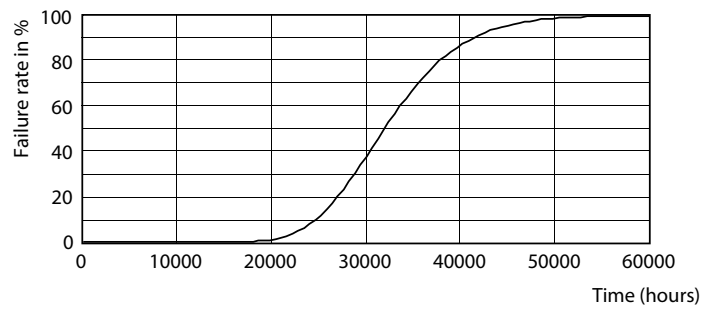

18W G13

18W G13

# CorePro LED tube Universal T8

## Lifetime



18W G13

