



LED Highbay

75HB/LED/840/ND FB 4/1

Philips LED high bay lamps are a direct replacement for 250W to 400W metal halide lamps which will deliver substantial energy savings. Philips LED HighBays delivers bright, clean light for a fraction of the energy used by conventional HID.

Product data

General information	
Cap-Base	EX39 [Exclusionary Mogul Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	75-175W

Light technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	8500 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	113.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	75 W
Lamp Current (Nom)	650 mA
Wattage Equivalent	175 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	Type B - bypass the ballast
Power Factor (Nom)	0.9
Voltage (Nom)	120-277 V

Temperature	
T-Case Maximum (Nom)	98 °C

Controls and dimming	
Dimmable	No

Mechanical and housing	
Bulb Finish	Frosted
Bulb Shape	T-shape


Approval and application	
Energy Consumption kWh/1000 h	- kWh

Product data	
Order product name	75HB/LED/840/ND FB 4/1
EAN/UPC - Product	046677542320
Order code	929001993104
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

LED Highbay

Material Nr. (12NC)	929001993104
Net Weight (Piece)	0.648 kg


Dimensional drawing




75HB/LED/840/ND FB 4/1

Product	D	C
75HB/LED/840/ND FB 4/1	141 mm	267 mm


Photometric data



LEDTrueForce HB EX39 200D 75 840

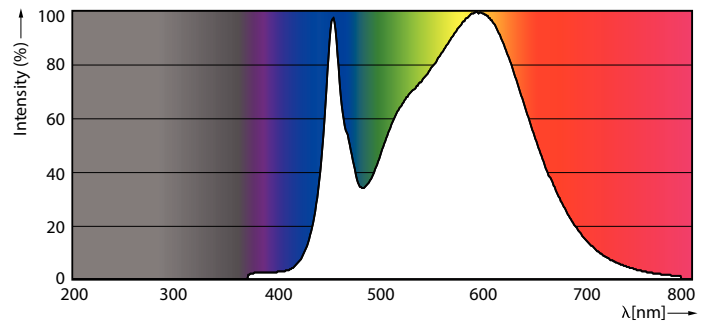



LEDTrueForce HB EX39 200D 840



LEDTrueForce HB EX39 200D 75

LED Highbay

Lifetime

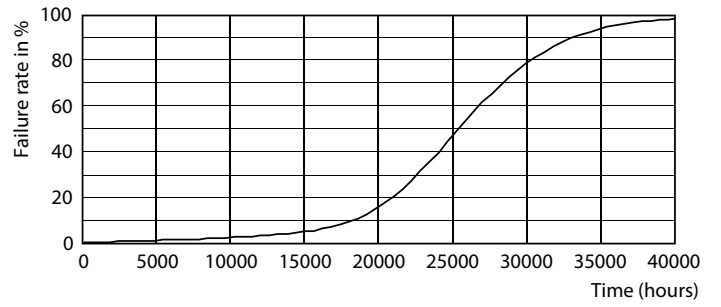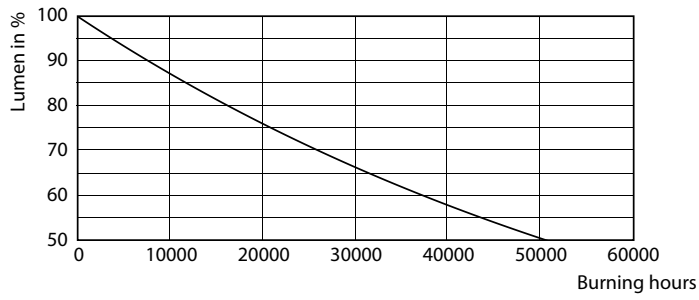

LEDTrueForce HB EX39 200D

LEDTrueForce HB EX39 200D

