



# TrueForce LED Public (Urban/Road – HPL/SON)



# TrueForce LED HPL ND 60-42W E40 840

Philips TrueForce LED lamps provide an easy LED solution with a fast payback to replace High-Intensity Discharge (HID) and High Pressure Sodium (SON) lamps. These post-top lamps bring the energy efficiency and long lifetime benefits of LED to HID replacement, delivering instant savings for a low initial investment. With the right lamp size and light distribution, customers can easily retrofit TrueForce LED lamps into their existing HPL and SON system, thereby enhancing the light quality with LED HID, without having to change the fixtures or sacrifice the light effect.

## **Warnings and Safety**

 $\cdot \ \text{Installation should always be performed by a qualified electrician or installer}. \ Use the installation guide for instructions$ 

#### **Product data**

| General information        |                     |
|----------------------------|---------------------|
| Cap-Base                   | E40 [ E40]          |
| EU RoHS compliant          | Yes                 |
| Nominal Lifetime (Nom)     | 50000 h             |
| Switching Cycle            | 50000X              |
| Technical Type             | 42-200W             |
| Flux measurement reference | Sphere              |
|                            |                     |
| Light technical            |                     |
| Color Code                 | 840 [ CCT of 4000K] |
| Beam Angle (Nom)           | 360 °               |
| Luminous Flux (Nom)        | 6000 lm             |

| Color Designation                     | Cool White (CW) |
|---------------------------------------|-----------------|
| Correlated Color Temperature (Nom)    | 4000 K          |
| Luminous Efficacy (rated) (Nom)       | 142.00 lm/W     |
| Color Consistency                     | <6              |
| Color Rendering Index (Nom)           | 80              |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %            |
|                                       |                 |
| Operating and electrical              |                 |
| Input Frequency                       | 50 to 60 Hz     |
| Power (Nom)                           | 42 W            |
| Lamp Current (Nom)                    | 186 mA          |

125 W

Datasheet, 2022, March 2 data subject to change


Wattage Equivalent

# TrueForce LED Public (Urban/Road - HPL/SON)

| Starting Time (Nom)             | 0.45 s    |
|---------------------------------|-----------|
| Warm Up Time to 60% Light (Nom) | 0.45 s    |
| Power Factor (Nom)              | 0.95      |
| Voltage (Nom)                   | 220-240 V |
| Temperature                     |           |
| T-Case Maximum (Nom)            | 90 ℃      |
| Controls and dimming            |           |
| Dimmable                        | No        |
| Mechanical and housing          |           |
| Bulb Finish                     | Clear     |
| Bulb Shape                      | Others    |
|                                 | ·         |
| Approval and application        |           |
| Energy Efficiency Class         | D         |

| Energy Consumption kWh/1000 h   | 42 kWh                              |
|---------------------------------|-------------------------------------|
| EPREL Registration Number       | 403606                              |
|                                 |                                     |
| Product data                    |                                     |
| Full product code               | 871869963828300                     |
| Order product name              | TrueForce LED HPL ND 60-42W E40 840 |
| EAN/UPC - Product               | 8718699638283                       |
| Order code                      | 929002006802                        |
| Numerator - Quantity Per Pack   | 1                                   |
| Numerator - Packs per outer box | 6                                   |
| Material Nr. (12NC)             | 929002006802                        |
| Net Weight (Piece)              | 0.500 kg                            |
|                                 |                                     |


# Dimensional drawing




TrueForce LED HPL ND 60-42W E40 840

# Product D C TrueForce LED HPL ND 60-42W E40 840 84 mm 191 mm

### Photometric data




LEDTrueForce E40 42W 4000K

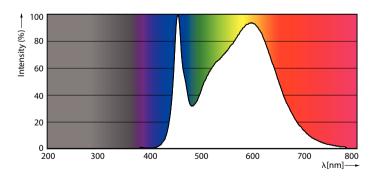

LEDTrueForce E40 42W 4000K


# TrueForce LED Public (Urban/Road - HPL/SON)


## Photometric data



LEDTrueForce E27 42W 3000K

## Lifetime

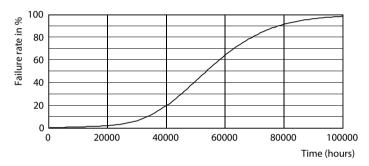

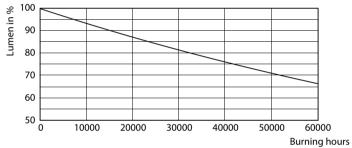

LEDTrueForce Others 360

LEDTrueForce Others 360



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.