



MASTER TL-D Eco

MASTER TL-D Eco 16W/865 1SL

The MASTER TL-D Eco lamp offers the same light output as a MASTER TL-D Super 80 lamp, while using less energy, thanks to the use of specific phosphors and a special gas filling. Application areas are schools, offices, governmental buildings and healthcare environments.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T8 [26 mm]
Life to 10% failures EM	12000 hr
Life to 10% fail Preheat EL,3h	17000 hr
Life to 10% fail Nonpreh EL,3h	10000 hr
Life to 50% failures EM	15000 hr
Life to 50% fail Preheat EL,3h	20000 hr
Life to 50% fail Nonpreh EL,3h	12000 hr
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	99 %
LSF EM 6000h Rated, 3h cycle	99 %
LSF EM 8000h Rated, 3h cycle	99 %
LSF EM 12000h Rated,3h cycle	89 %
LSF EM 16000h Rated,3h cycle	33 %
LSF EM 20000h Rated,3h cycle	2 %

• Light Technical Characteristics

Color Code	865 [CCT of 6500K]
Color Rendering Index	85 Ra8
Color Designation (text)	Cool Daylight

Color Temperature	6500 K
Luminous Flux EM 25°C, Rated	1125 Lm
Luminous Flux EM 25°C, Nominal	1125 Lm
Luminous Flux Lamp EM 30°C	1225 Lm
Lum Efficacy Rated EM 25°C	72 Lm/W
LLMF EM 2000h Rated	96 %
LLMF EM 4000h Rated	95 %
LLMF EM 6000h Rated	94 %
LLMF EM 8000h Rated	93 %
LLMF EM 12000h Rated	92 %
LLMF EM 16000h Rated	91 %
LLMF EM 20000h Rated	90 %
Design Temperature	30 C
Chromaticity Coordinate X	314 -
Chromaticity Coordinate Y	338 -

• Electrical Characteristics

Lamp Wattage	16 W
Lamp Wattage EM 25°C, Nominal	16 W
Lamp Wattage EM 25°C, Rated	15.7 W



MASTER TL-D Eco

Lamp Voltage EM 51 V
 25°C
 Lamp Current EM 0.380 A
 25°C
 Dimmable Yes

• Environmental Characteristics

Energy Efficiency A
 Label (EEL)
 Mercury (Hg) Content 2.0 mg
 Energy consumption kWh/1000h 20 kWh

• Product Dimensions


Base Face to Base 589.8 (max) mm
 Face A
 Insertion Length B 594.5 (min), 596.9 (max) mm

Overall Length C 604.0 (max) mm
 Diameter D 28 (max) mm

• Product Data


Order code 927922886515
 Full product code 927922886515
 Full product name MASTER TL-D Eco 16W/865 1SL
 Order product name MASTER TL-D Eco 16W/865 1SL/25
 Pieces per pack 1
 Packing configuration 25
 Packs per outerbox 25
 Bar code on pack - EAN1 8711500268716
 Bar code on outerbox - EAN3 8711500268723
 Logistic code(s) - 12NC 927922886515
 ILCOS code FD-16/65/1B-E-G13-26/604
 Net weight per piece 68.900 gr

Dimensional drawing

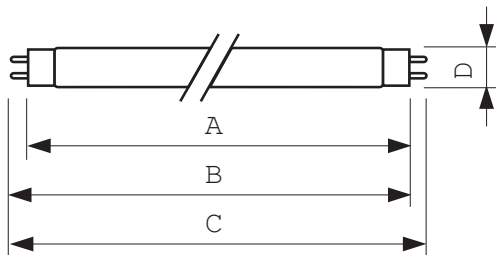



MASTER TL-D Eco 16W/865 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D Eco 16W/865	589.8	594.5	596.9	604.0	28



G13

Photometric data

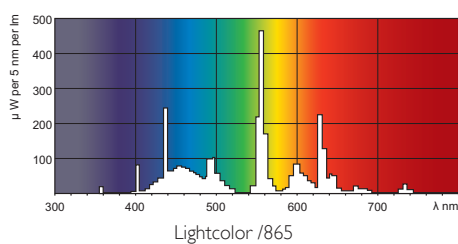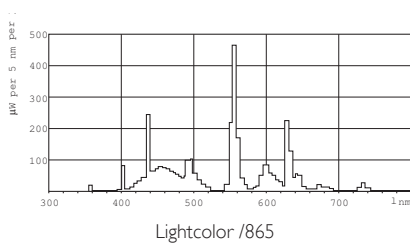



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 10
data subject to change