



# MASTER TL5 High Efficiency

## MASTER TL5 HE 21W/840 1SL

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

### Product data

#### • General Characteristics

System Description	High Efficiency
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Life to 50% fail	24000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

#### • Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering	85 Ra8
Index	
Color Designation	Cool White
(text)	
Color Temperature	4000 K
Luminous Flux EL	1850 Lm
25°C, Rated	
Luminous Flux EL	1850 Lm
25°C, Nominal	

Luminous Flux Lamp	2100 Lm
EL 35°C	
Lum Efficacy Rated	90 Lm/W
HF 25°C	
Lum Efficacy Rated	101 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

#### • Electrical Characteristics

Lamp Wattage	21 W
Lamp Wattage EL	20.6 W
25°C, Rated	
Lamp Wattage EL	21.0 W
25°C, Nominal	
Lamp Wattage EL	20.7 W
35°C	
Lamp Voltage EL	126 V
25°C	



# MASTER TL5 High Efficiency

Lamp Voltage EL 35°C	123 V
Lamp Current EL 25°C	0.165 A
Lamp Current EL 35°C	0.170 A
Dimmable	Yes

## • Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	23 kWh

## • Measuring Conditions

Calibration Current	0.170 A
HF Generator Rated Voltage	246 V
Resistor	725 ohm


## • Product Dimensions

Base Face to Base Face A	849.0 (max) mm
Insertion Length B	853.7 (min), 856.1 (max) mm
Overall Length C	863.2 (max) mm
Diameter D	17 (max) mm

## • Product Data


Order code	927926284061
Full product code	927926284061
Full product name	MASTER TL5 HE 21W/840 1SL
Order product name	MASTER TL5 HE 21W/840 1SL/20
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8711500639448
Bar code on outerbox - EAN3	8711500264558
Logistic code(s) - 12NC	927926284061
ILCOS code	FDH-21/40/1B-L/P-G5-16/850
Net weight per piece	80.500 gr

## Dimensional drawing

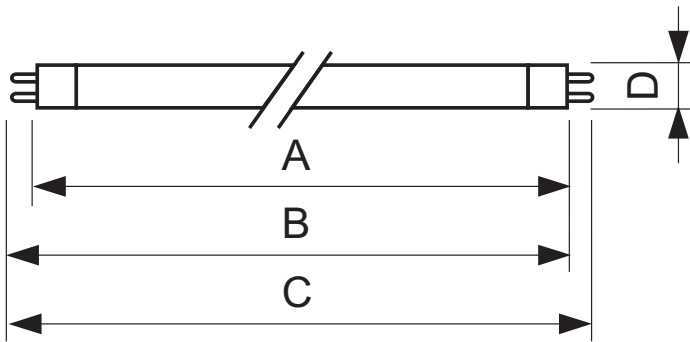



## MASTER TL5 HE 21W/840 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 21W/840/GP HE	849.0	853.7	856.1	863.2	17



G5

## Photometric data

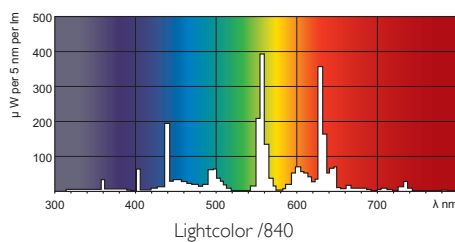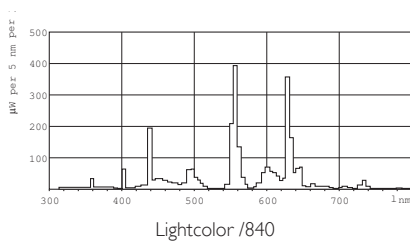



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, April 10  
data subject to change