



MASTER TL5 High Efficiency Secura

MASTER TL5 HE Secura 35W/830 UNP

This TL5 High Efficiency Secura lamp (tube diameter 16 mm) has a protective coating that keeps glass and lamp components together in the event of accidental breakage. The lamp is easily identifiable by a blue ring at one end. Application areas are all places where glass shatters can disturb operations and can have an impact on product and people safety, e.g. the food and beverage industry. This lamp is compliant with HACCP regulations and supports HACCP certification.

Product data

• General Characteristics

System Description	High Efficiency
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Life to 50% fail	24000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Luminous Flux EL	3325 Lm
25°C, Rated	
Luminous Flux EL	3325 Lm
25°C, Nominal	

Luminous Flux Lamp	3650 Lm
EL 35°C	
Lum Efficacy Rated	94 Lm/W
HF 25°C	
Lum Efficacy Rated	105 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Electrical Characteristics

Lamp Wattage	35 W
Lamp Wattage EL	35.5 W
25°C, Rated	
Lamp Wattage EL	35.5 W
25°C, Nominal	
Lamp Wattage EL	34.7 W
35°C	
Lamp Voltage EL	205 V
25°C	



asimpleswitch.com

PHILIPS

MASTER TL5 High Efficiency Secura

Lamp Voltage EL 35°C	209 V
Lamp Current EL 25°C	0.175 A
Lamp Current EL 35°C	0.170 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	38 kWh

• Measuring Conditions

Calibration Current	0.170 A
HF Generator Rated Voltage	413 V
Resistor	1200 ohm

• Product Dimensions



Base Face to Base Face A	1449.0 (max) mm
-----------------------------	-----------------

Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

• Product Data

Order code	927927183018
Full product code	927927183018
Full product name	MASTER TL5 HE Secura 35W/830 UNP
Order product name	MASTER TL5 HE Secura 35W/830 UNP
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8711500952172
Bar code on outerbox - EAN3	8711500952189
Logistic code(s) - 12NC	927927183018
ILCOS code	FDH-35/30/1B-L/P-G5-16/1450
Net weight per piece	184.250 gr

Dimensional drawing


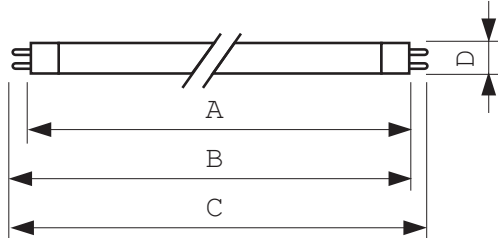


G5

MASTER TL5 HE Secura 35W/830 UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HE Secura 35W/830	1449.0	1453.7	1456.1	1463.2	17

Photometric data

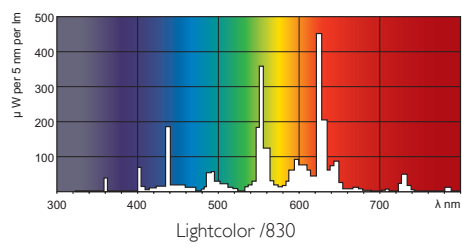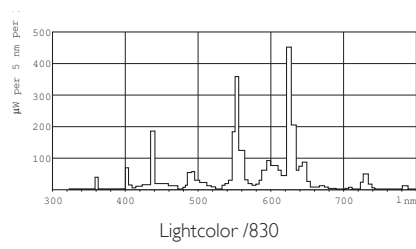

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, October 31
data subject to change