



TUV T5

TUV 36T5 HO G5 UNP 40

TUV T5 lamps are single- or double-ended UV-C 253.7 nm emitting lamps. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. TUV T5 lamps offer constant UV output over their complete lifetime.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Plants and/or materials that are exposed to UV-C and/or ozone for a long time may become damaged and/or discolored.

Product data

General information	
Cap-Base	G5
Main Application	Disinfection
Useful Life (Nom)	9000 h
System Description	High Output
Light technical	
Color Code	TUV
Color Designation	- [Not Specified]
Depreciation at Useful Lifetime	15 %
Operating and electrical	
Power (Nom)	75 W
Lamp Current (Nom)	0.8 A


Voltage (Nom)	184 V
Mechanical and housing	
Cap-Base Information	G5
Bulb Shape	T16
Approval and application	
Mercury (Hg) Content (Nom)	5.5 mg
UV	
UV-C Radiation at 100 hr	25 W
Product data	
Full product code	871951429911500
Order product name	TUV 36T5 HO G5 UNP 40

TUV T5

EAN/UPC - Product	8719514299115
Order code	928002404014
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40

Material Nr. (12NC)	928002404014
Net Weight (Piece)	72.000 g

Dimensional drawing

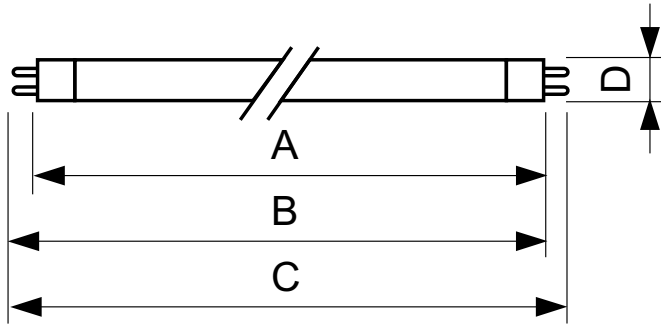

TUV 36T5 HO G5 UNP 40

Product	D	C
TUV 36T5 HO G5 UNP 40	16 mm	827.6 mm

