



CorePro LEDcandle

CorePro LEDcandle ND 5.5-40W E14 827 B35 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

• General Characteristics

Cap-Base	E14
Bulb	B35 [B 35mm]
Bulb Finish	Frosted
Rated Lifetime (hours)	15000 hr
Nominal Lifetime hours	15000 hr

• Light Technical Characteristics

Color Code	827
Color Designation (text)	Warm White
Correlated Color Temperature	2700 K
Luminous Flux	470 Lm
Color rendering index	80
Luminous Efficacy Lamp	85 Lm/W
Color Temperature	2700 K [CCT 2700K]
Rated Luminous Flux	470 Lm
LLMF - end nominal lifetime	70 %
Colour consistency	6 steps

• Electrical Characteristics

Wattage	5.5 W
Wattage Technical	5.5 W
Voltage	220-240 V
Line Frequency	50-60 Hz
Power Factor	0.5 -
Lamp Current mA	50 mA
Dimmable	No
Wattage Equivalent	40 W

Rated Wattage	5.5 W
Starting Time	0.5 (max) s
Warm-up Time to 60% Light Outp	instant full light
Suitable for accent lighting	No

• Temperature Characteristics

T-case maximum	95 C
----------------	------

• Environmental characteristics

Energy Efficiency Label (EEL)	A+
Energy consumption kWh/1000h	6 kWh

• Measuring Conditions

Switching cycle	50000X
-----------------	--------

• Product Dimensions

Overall Length C	106 mm
Diameter D	35 mm

• Product Data

Order code	929001157702
Full product code	929001157702
Full product name	CorePro LEDcandle ND 5.5-40W E14 827 B35 FR
Order product name	CorePro candle ND 5.5-40W E14 827 B35 FR
Pieces per pack	1
Packaging configuration	10




PHILIPS

CorePro LEDcandle

Packs per outerbox 10
Bar code on pack - EAN1 8718291762386
Bar code on outerbox - EAN3 8718291762393


Logistic code(s) - 929001157702
12NC
Net weight per piece 0.040 kg

Dimensional drawing

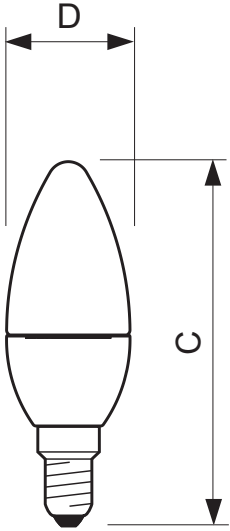


CorePro LEDcandle ND 5.5-40W E14 827 B35 FR

Product	C (Norm)	D (Norm)
LED ND 5.5-40W E14 827 220-240V B35 FR	106	35



E14

Photometric data

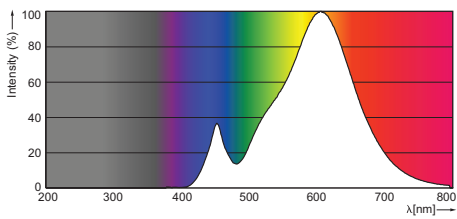

CorePro 822-827



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, November 16
data subject to change