

A-Shape LED

5A19/PER/927-922/CL/G/E26/WGX 1FB T20

Philips A-shape LED lamps are the LED alternative to standard incandescents. It provides beautiful light and dependable performance you expect from LED at an affordable price.


Product data

General information		Warm Up Time to 60% Light (Nom)	
Cap-Base	E26 [Single Contact Medium Screw]		0.5 s
EU RoHS compliant	Yes	Power Factor (Nom)	0.75
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)	120 V
Switching Cycle	20000X	Temperature	
Technical Type	5-40W	T-Case Maximum (Nom)	50 °C
Light technical		Controls and dimming	
Color Code	927-922 [CCT of 2700K-2200K]	Dimmable	Yes
Beam Angle (Nom)	300 °	Mechanical and housing	
Luminous Flux (Nom)	450 lm	Bulb Finish	Clear
Color Designation	Warm Glow(WG)	Bulb Material	Glass
Correlated Color Temperature (Nom)	- K	Bulb Shape	A19 (A19)
Luminous Efficacy (rated) (Nom)	90.00 lm/W	Approval and application	
Color Consistency	<4	Energy Consumption kWh/1000 h	- kWh
Color Rendering Index (Nom)	90	Energy Certifications	Energy Star
LLMF At End Of Nominal Lifetime (Nom)	70 %	Product data	
Operating and electrical		Order product name	5A19/PER/927-922/CL/G/E26/WGX 1FB T20
Input Frequency	50 to 60 Hz	EAN/UPC - Product	046677549480
Power (Nom)	5 W	Order code	929001969504
Lamp Current (Nom)	55 mA	Numerator - Quantity Per Pack	1
Wattage Equivalent	40 W		
Starting Time (Nom)	0.5 s		

A-Shape LED

Numerator - Packs per outer box	6
Material Nr. (12NC)	929001969504
Net Weight (Piece)	0.030 kg



Dimensional drawing



5A19/PER/927-922/CL/G/E26/WGX 1FB T20

Product	D	C
5A19/PER/927-922/CL/G/E26/WGX 1FB T20	60 mm	108 mm


Photometric data

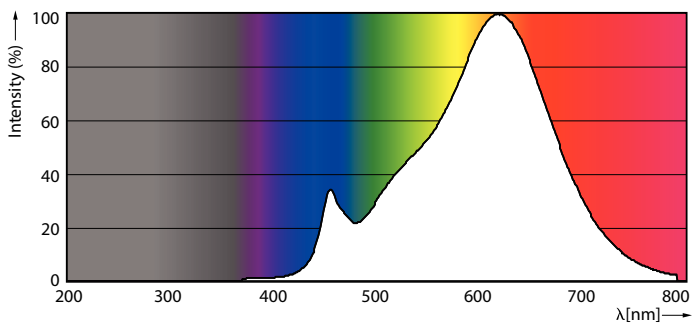

General Lighting Data

LEDbulb CL,FR 927



LEDbulb 40W E26 A19 927 CL



LEDbulb 927 CL

A-Shape LED

Lifetime

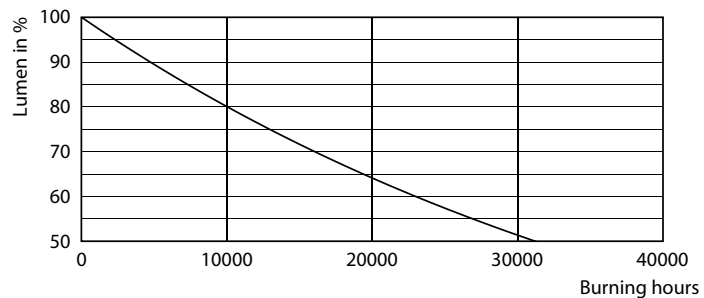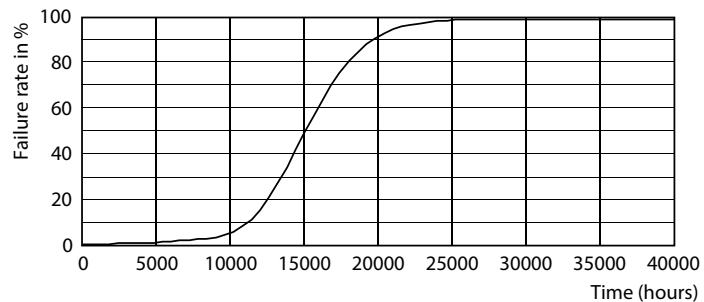

Life Expectancy Diagram

Lumen Maintenance Diagram

