

# MASTER LEDtube EM/ Mains T8



## MASTER LEDtube 1200mm UE 13.5W 840 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

#### **Warnings and Safety**

• NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

#### **Product data**

General information	
Cap-Base	G13 ROT (Rotating) [ Medium Bi-Pin
	Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	75000 h
Switching Cycle	200000X
Flux measurement reference	Sphere
Light technical	
Color Code	840 [ CCT of 4000K]
Beam Angle (Nom)	160 °
Luminous Flux (Nom)	2500 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K

Luminous Efficacy (rated) (Nom)	185.00 lm/W	
Color Consistency	<6	
Color Rendering Index (Nom)	80	
LLMF At End Of Nominal Lifetime (Nom) 70 %		
Operating and electrical		
Input Frequency	50 to 60 Hz	
Power (Nom)	13.5 W	
Lamp Current (Max)	69 mA	
Lamp Current (Min)	56 mA	
Starting Time (Nom)	0.5 s	
Warm Up Time to 60% Light (Nom)	0.5 s	
Power Factor (Nom)	0.9	


Datasheet, 2022, May 16 data subject to change


# **MASTER LEDtube EM/Mains T8**

Voltage (Nom)	220-240 V	
Temperature		
T-Ambient (Max)	45 ℃	
T-Ambient (Min)	-20 ℃	
T-Storage (Max)	65 ℃	
T-Storage (Min)	-40 °C	
T-Case Maximum (Nom)	55 ℃	
Controls and dimming		
Dimmable	No	
Mechanical and housing		
Bulb Finish	Frosted	
Bulb Material	Glass	
Product Length	1200 mm	
Bulb Shape	Tube, double-ended	
Approval and application		
Approval and application		
Energy Efficiency Class	В	

Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur
	certificate
Energy Consumption kWh/1000 h	14 kWh
EPREL Registration Number	453167
Product data	
Full product code	871951433972900
Order product name	MASTER LEDtube 1200mm UE 13.5W 840 T8
EAN/UPC - Product	8719514339729
Order code	929003067002
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929003067002
Net Weight (Piece)	0.235 kg

## Dimensional drawing






#### Photometric data




LEDtube MAS 13,5W G13 2500lm 840-GUL

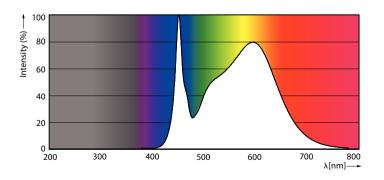

LEDtube MAS 13,5W G13 2500lm 840-POC


# **MASTER LEDtube EM/Mains T8**

### Photometric data



Light Distribution Diagram

### Lifetime

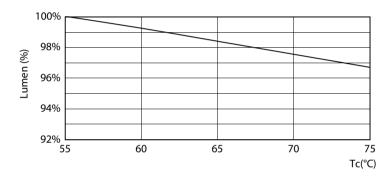

LEDtube MAS 13,5W 70K LumenVsTc-LMP



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.