

UltraEfficient LED bulb

MAS LEDBulbND5.2-75W E27 840A70 CLG UE

This is the most efficient LED bulb from Signify. 210lm/W helps to concrete the company statement of sustainability. 50000 hour lifetime helps to extend the replacement cycle to reduce the waste. This is not only the high SPEC product, but also keep the light quality of Philips brand

Product data

General information	
Cap-Base	E27 [E27]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Flux measurement reference	Sphere
Light technical	
Color Code	840 [CCT of 4000K]
Luminous Flux (Nom)	1095 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	210.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	5.2 W


Lamp Current (Nom)	60 mA
Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.4
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Bulb Finish	Clear
Bulb Shape	A70 [A 70mm]
Approval and application	
Energy Efficiency Class	A
Energy Consumption kWh/1000 h	6 kWh

UltraEfficient LED bulb

EPREL Registration Number	1099146
Product data	
Full product code	871951443589600
Order product name	MAS LEDBulbND5.2-75W E27 840A70 CLG UE
EAN/UPC - Product	8719514435896
Order code	929003480502

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929003480502
Net Weight (Piece)	0.050 kg


Dimensional drawing




MAS LEDBulbND5.2-75W E27 840A70 CLG UE

Product	D	C
MAS LEDBulbND5.2-75W E27 840A70 CLG UE	70 mm	127 mm


Photometric data



Light Distribution Diagram





General uniform lighting

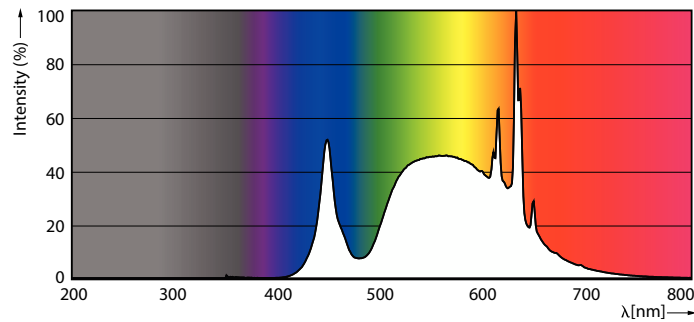

Spectral Power Distribution Colour

UltraEfficient LED bulb

Lifetime

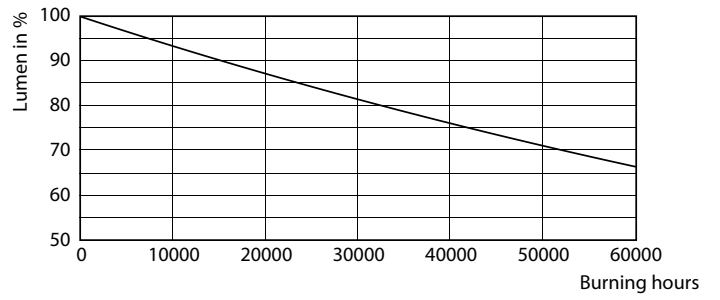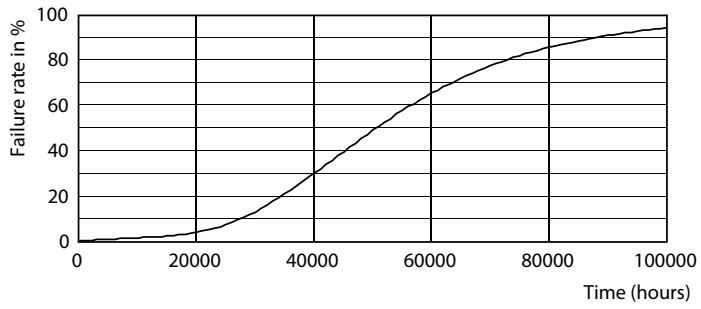

50K

50K

