



# MASTER VALUE LEDspot MV

## MAS LEDspotMV VLE D 3.5-35W GU10 827 60D

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

### Product data

General Information	
Cap-Base	GU10 [ GU10]
Nominal Lifetime (Nom)	35000 h
Switching Cycle	50000X
Technical Type	3.5-35W
Light Technical	
Color Code	827 [ CCT of 2700K]
Beam Angle (Nom)	60 °
Luminous Flux (Nom)	305 lm
Luminous Flux (Rated) (Nom)	305 lm
Luminous Intensity (Nom)	350 cd
Color Designation	Warm White (WW)
Rated Beam Angle	60 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	87.14 lm/W

Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux In 90° Cone (Rated)	265 lm
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	3.5 W
Lamp Current (Nom)	19 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.8
Voltage (Nom)	220-240 V

# MASTER VALUE LEDspot MV


Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A++
Energy Consumption kWh/1000 h	4 kWh

Product Data	
Full product code	871869656300700
Order product name	MAS LEDspotMV VLE D 3.5-35W GU10 827 60D
EAN/UPC - Product	8718696563007
Order code	929001215802
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001215802
Net Weight (Piece)	0.036 kg

## Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



## Dimensional drawing



GU10 230V 4W-35W 260lm 60D 2700K GU10 D

Product	D	C
MAS LEDspotMV VLE D 3.5-35W GU10 827 60D	50 mm	56 mm

## Photometric data

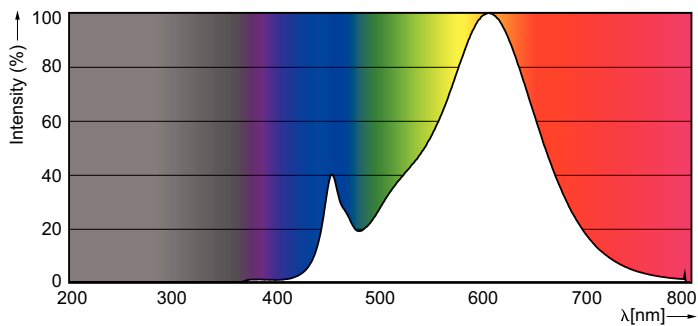

## MASTER VALUE LEDspot MV

