



Actinic BL PL-S/PL-L

Actinic BL PL-S 9W/10/2P 1CT/6X10BOX

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	G23 [G23]
Main Application	Insect traps
Life to 50% Failures (Nom)	1000 h
Useful Life (Nom)	2000 h
Light technical	
Color Code	210 [leadfree 360 glass (10)]
Color Designation	Ultra Violet A
Chromaticity Coordinate X (Nom)	227
Chromaticity Coordinate Y (Nom)	212
UV Depreciation at 2000 h	20 %
Operating and electrical	
Power (Nom)	8.6 W

Lamp Current (Nom)	0.17 A
Voltage (Nom)	60 V
Mechanical and housing	
Cap-Base Information	2 Pins
Bulb Shape	2XT12
UV	
UV-B/UV-A (IEC)	0.1 %
UV-A Radiation 100Hr (IEC)	1.66 W
Product data	
Full product code	871150095194680
Order product name	Actinic BL PL-S 9W/10/2P 1CT/6X10BOX
EAN/UPC - Product	8711500951946


Datasheet, 2022, January 14 data subject to change

Actinic BL PL-S/PL-L

Order code	927901721008
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	60
Material Nr. (12NC)	927901721008

Net Weight (Piece) 32.000 g

Dimensional drawing





Actinic BL PL-S 9W/10/2P 13 mm 28 mm 128.8 mm 144.5 mm 167 mm 1CT/6X10BOX

D1 (max) D (max) A (max) B (max) C (max)

Actinic BL PL-S 9W/10/2P 1CT/6X10BOX

Photometric data



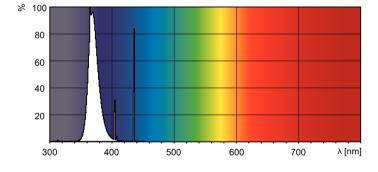

XDPB_XUAPLS_10_110_210-Spectral power distribution B/W

XDPO_XUAPLS_10_110_210-Spectral power distribution Colour



Product