



MASTER PL- S 7W/ 840/2P 1CT

Product family description
Energy- saving compact fluorescent lamps
Compact long- arc low- pressure mercury
discharge lamp
Envelope consists of 2 parallel narrow
fluorescent tubes

Product Features

- 2- pin base with a housing incorporating the special instant starter and capacitor
- Lamp characteristics are influenced by operating conditions and control gear used
- The lamps contain only 3 mg of mercury
- Dimming is not possible

Environment

- Good environmental choice because of high energy efficiency, long life and low light output depreciation, lowest mercury content
- Compliant with all RoHS and WEEE requirements: the lamps have a very low content of mercury, are lead free and make no use of hazardous flame retardants

Product Benefits

- Optimal light performance for short or long operation per switch on
- Long life and sustainable light output

Application

- Designed for use in hotels, restaurants, theatres and homes
- Suitable for use in signs, corridors, security and orientation lighting


System

- For use on conventional copper iron ballasts
- Radio interference suppression capacitor is installed


Product data	
Order code	260659 70
Full product code	871150026065970
Full product name	MASTER PL- S 7W/840/2P 1CT
Order product name	MASTER PL- S 7W/840/2P 1CT/5X10BOX
Packing type	1 Lamp in a Folding Carton
Pieces per pack	1
Packing configuration	5X10BOX
Packs per outerbox	50
Bar code on pack - EAN1	8711500260659
Bar code on intermediate packing - EAN2	8711500260666
Bar code on outerbox - EAN3	8711500260673
Logistic code(s) - 12NC	9279 356 84011
ILCOS code	FSD- 7/40/1B- I- G23
Net weight per piece	26.000 (GR)
Successor order code	
Rated Lamp Wattage[W]	7W
Colour Code	840 [CCT of 4000K]
Cap- Base Information	2P

Product data


Cap- Base	G23[Two- Pin Compact Fluorescent; low preheat current; two retainers]
Execution	/2P[2 Pins]
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content[mg]	1.4
Colour Rendering Index[Ra8]	82
Colour Designation (text)	Cool White
Colour Temperature[K]	4000
Lamp Luminous Flux EM[Lm]	400

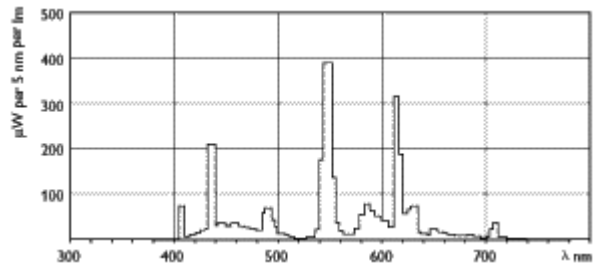

MASTER PL-S/840

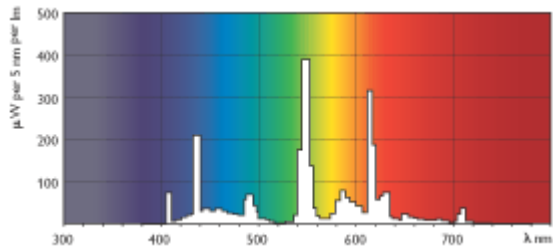

MASTER PL-S/840

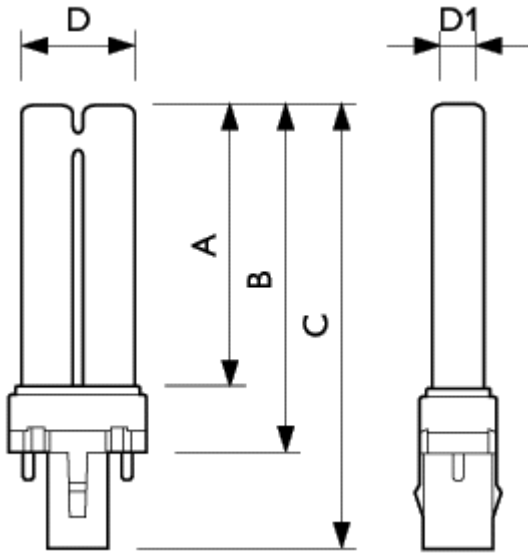

MASTER PL-S

	A	B	C	D	D1
Full product name	Max	Max	Max	Max	Max
MASTER PL-S 7W/ 840/2P 1CT	97	113	135	28	13

