



MASTER PL- T 26W/ 840/2P 1CT

Product family description
Energy saving compact fluorescent lamp
Compact long- arc low- pressure mercury
discharge lamp
Envelope consists of 6 parallel narrow
fluorescent tubes

Product Features

- 2- pin base with a housing incorporating the lamp glow switch starter
- Fast light run up
- Philips invented bridge technology applied
- Dimming is not possible

Product Benefits

- Optimal light performance for short or long operation per switch on
- Substantial more light (about 15% more) per light point than common
- Long life and sustainable light output

Environment

- Good environmental choice because of high energy

efficiency, long life and low light output depreciation, lowest mercury content

- Compliant with all RoHS and WEEE requirements: the lamps have a very low content of mercury, are lead free and make no use of radioactive materials and hazardous flame retardants

Application

- Designed for general or supplementary lighting in professional and semi- professional environments
- Ideal for use in recessed or surface mounted downlighters, wall units


System

- For use with conventional electromagnetic ballast
- Radio interference suppression capacitor installed


Product data

Order code	611130 70
Full product code	871150061113070
Full product name	MASTER PL- T 26W/840/2P 1CT
Order product name	MASTER PL- T 26W/840/2P 1CT/5X10BOX
Packing type	1 Lamp in a Folding Carton
Pieces per pack	1
Packing configuration	5X10BOX
Packs per outerbox	50
Bar code on pack - EAN1	8711500611130
Bar code on intermediate packing - EAN2	8711500611147
Bar code on outerbox - EAN3	8711500611161
Logistic code(s) - 12NC	9279 145 84071
ILCOS code	FSM- 26/40/1B- I- GX24d=3
Net weight per piece	66.000 (GR)
Successor order code	
Rated Lamp Wattage[W]	26W


Product data	
Colour Code	840 [CCT of 4000K]
Cap- Base Information	2P
Cap- Base	GX24d- 3
Execution	/2P[2 Pins]
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content[mg]	1.4
Colour Rendering Index[Ra8]	82
Colour Designation (text)	Cool White
Colour Temperature[K]	4000
Lamp Luminous Flux EM[Lm]	1800

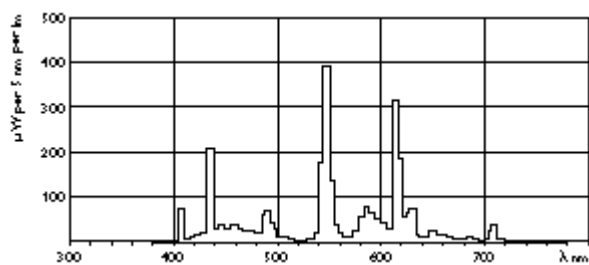

MASTER PL- T/840

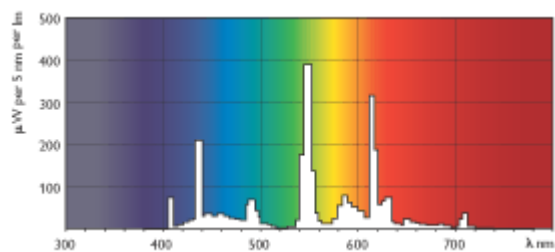

MASTER PL- T/840

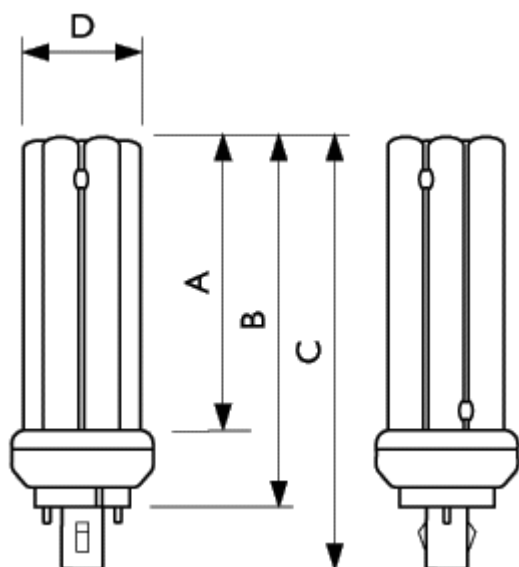

MASTER PL-T GX24d-3

	A	B	C	D
Full product name	Max	Max	Max	Max
MASTER PL-T 26W/ 840/2P 1CT	86.7	111.0	134.2	41

