


STAGE/THEATRE Single Ended HPL FOR ETC "SOURCE FOUR" FIXTURES

The HPL lamps are designed especially for the «Source Four» spotlight family of ETC. The reflector of the spotlight makes optimum use of the filament construction, so that the generated light output (from 750W lamps) is now the same as for an existing 1000W fixture.

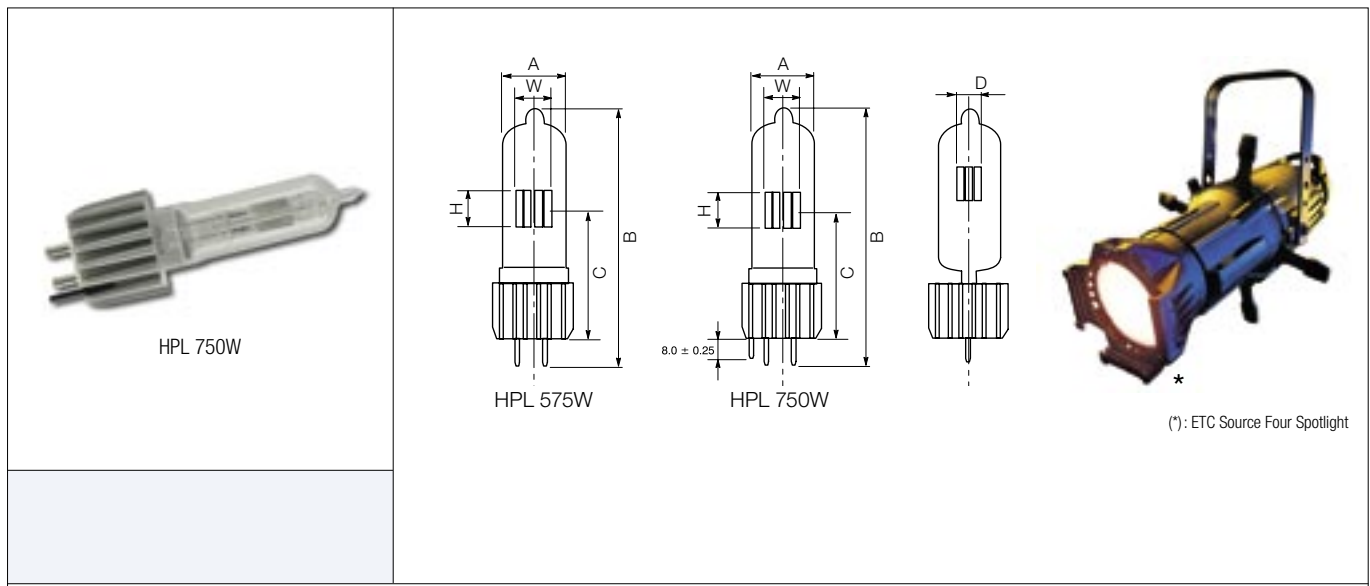

(*): ETC Source Four Spotlight

FEATURES

- Ultra compact filament design for high lumen output and accurate aiming
- Optimum system performance
- High beam intensity
- Reinforced pinch seal for extra mechanical resistance
- Special heat sink base reducing seal temperature and maximizing life. Suited for use in high temperature applications
- Optimal lamp alignment also ensured by the heat sink base
- Long life versions (LL) ideal for architectural lighting

APPLICATIONS

- Theatre lighting
- TV and studio
- Entertainment and Architectural applications
- Professional Photography

DIRECTIONS FOR USE

- To be used in the ETC Source Four range of spotlights only
- **Licensed under U.S. patent # 5268613, Japanese patent #2501772**

Item description	Voltage	Watt	Base	Coil	Lumen	Life	Burning Position	Colour Temp.
	V	W						
HPL 575W 230V	230	575	G9.5	6-C8	14900	400	Any	3200K
HPL 575W 240V	240	575	G9.5	6-C8	14900	400	Any	3200K
HPL 750W 230V	230	750	G9.5	6-C8	19750	300	Any	3200K
HPL 750W 240V	240	750	G9.5	6-C8	19750	300	Any	3200K
HPL 575W 230V LL	230	575	G9.5	6-C8	11780	1500	Any	3050K
HPL 575W 240V LL	240	575	G9.5	6-C8	11780	1500	Any	3050K
HPL 750W 230V LL	230	750	G9.5	6-C8	15600	1500	Any	3050K
HPL 750W 240V LL	240	750	G9.5	6-C8	15600	1500	Any	3050K

Item description	Dimensions			Filament dimensions			Packing Quantity	Ordering Code
	A	B	C	W	D	H		
	mm	mm	mm	mm	mm	mm		
HPL 575W 230V	19,0	104,0	60,3	8,7	7,5	10	10	0061800
HPL 575W 240V	19,0	104,0	60,3	8,7	7,5	9,4	10	0061801
HPL 750W 230V	19,0	104,0	60,3	8,7	7,5	11,5	10	0061802
HPL 750W 240V	19,0	104,0	60,3	8,7	7,5	11,5	10	0061803
HPL 575W 230V LL	19,0	104,0	60,3	8,7	7,5	12	10	0061804
HPL 575W 240V LL	19,0	104,0	60,3	8,7	7,5	12	10	0061805
HPL 750W 230V LL	19,0	104,0	60,3	8,7	7,5	13	10	0061806
HPL 750W 240V LL	19,0	104,0	60,3	8,7	7,5	13	10	0061807