



Actinic BL 20W/10 SLV

Product family description
Tubular low-pressure mercury vapour fluorescent lamps

Product Features


- Emit long-wave UV-A radiation in the 350 - 400 nm range
- UV-B/UV-A ratio less than 0.1% (UV-B: 280 - 315 nm)
- R (Reflector) lamps have a 200° internal reflector

Application



- Photopolymerisation processes
- Reprography
- Insect traps

Product data	
Order code	710918 40
Full product code	871150071091840
loccod	
Full product name	Actinic BL 20W/10 SLV
Order product name	Actinic BL 20W/10 SLV/25
Packing type	1 Lamp in Open end Sleeve
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500710918
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500710925
Logistic code(s) - 12NC	9280 035 01029 9280 035 01039
ILCOS code	
Net weight per piece	156.000 GR
Successor order code	
Cap-Base	G13 [G13]
Bulb	T38

Product data	
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures EM	9000 hr
Rated Lamp Wattage	20W
Technical Lamp Power	19.3 W
Lamp Voltage	57 V
Lamp Current	0.37 A
Mercury (Hg) Content	13.0 mg
Colour Code	10
Colour Designation	Actinic
UV-A Radiation 100hr (IEC)	4.7 W
UV-B/UV-A (IEC)	0.2 %




Actinic BL G13 -

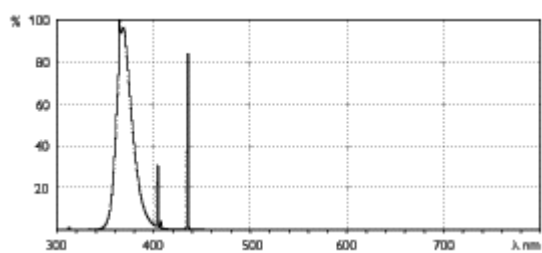

Actinic BL/10

Cap-Base G13

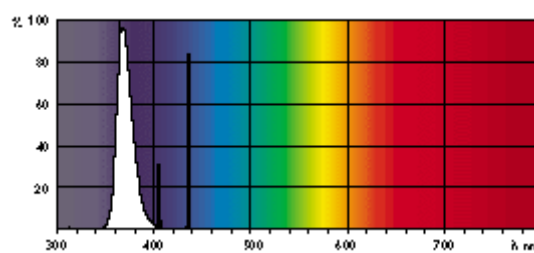

Actinic BL/10

	A	A	B	B	B	B
Full product name	Max	Max	Min	Min	Max	Max
Actinic BL 20W/ 10 SLV	589.8	589.8	594.5	594.5	596.9	596.9

