



TL 40W/03 RS SLV

Product family description
Tubular low- pressure mercury vapour
discharge lamps

Product Features

- Internally coated with a white fluorescent powder to convert the short- wave UV radiation into useful actinic radiation
- Emit radiation in the range 380 - 480 nm with a maximum at 420 nm
- Spectral energy distribution in accordance with the spectral sensitivity of a number of diazo copying papers
- For maximum beauty of marine aquaria, TL /03 "Aqua


Coral" lamps can be used in combination with full-spectrum "Natural Daylight" fluorescent lamps

Application


- Diazo copying machines
- Marine aquaria
- Phototherapy (neonatal jaundice treatment)

Product data	
Order code	626066 40
Full product code	871150062606640
Full product name	TL 40W/03 RS SLV
Order product name	TL 40W/03 RS SLV/25
Packing type	1 Sleeve
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500626066
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500626073
Logistic code(s) - 12NC	9280 113 00305
ILCOS code	
Net weight per piece	292.000 (GR)
Successor order code	
Rated Lamp Wattage[W]	40W
Colour Code	03
System Description	RS [Rapid Start]
Packing Type	SLV [1 Sleeve]
Packing Configuration	25
Cap- Base	G13
Bulb	T38
Main Application	Reprography

Product data	
Useful Life[hr]	3000
Life to 50% failures EM[hr]	9000
Product Nett Weight[gr]	292
Technical Lamp Power[W]	39
Lamp Voltage[V]	101
Lamp Current[A]	0.43
Colour Designation (text)	Super Actinic
UV- A Radiation 100hr (IEC)[W]	0.35
UV- B/UV- A (IEC)[%]	0.5

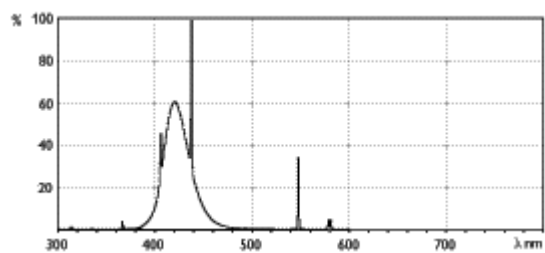

TL/03

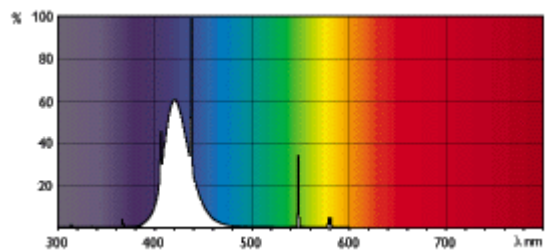

TL/03

