

## QTi 1X35/49/80 GII

QUICKTRONIC INTELLIGENT | ECG for FL 16 mm



### Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Sports halls and factories
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Modernization of existing systems
- Suitable for luminaires of protection classes I and II

### Product family benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

### Product family features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Lifetime: > 100,000 h (for T = 65 °C at T<sub>c</sub>)
- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929

# Product datasheet

## Technical data

### Electrical data

Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage DC	176...276 V
Operating frequency	42...85 kHz
Max. ECG no. on circuit breaker 10 A (B)	8 <sup>1)</sup>
Max. ECG no. on circuit breaker 16 A (B)	13 <sup>1)</sup>
Inrush current	53 A


<sup>1)</sup> Type B

### Light technical data

Starting time	1.0 s <sup>1)</sup>
---------------	---------------------

<sup>1)</sup> If there is a temporary interruption in the power supply (< 0.5 s), the lamp will start within 0.3 s

### Dimensions & weight

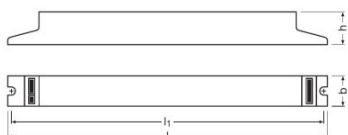

Length	360.0 mm
Width	30.0 mm
Height	21.0 mm
Mounting hole spacing, length	350.0 mm
Product weight	240.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

<sup>1)</sup> Maximum 56 days/year at 85 %

## Product datasheet

### Lifespan

<b>ECG lifetime</b>	100000 h <sup>1)</sup>
---------------------	------------------------

<sup>1)</sup> At  $T_{case} = 65^{\circ}\text{C}$  at  $T_{point}$  / 10% failure rate

### Expected Lifetime

Product name	Lamp group				
QTi 1X35/49/80 GII	HE 35 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	45	55	65
		Lifetime [h]	100000	100000	100000
	HO 49 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	55	65
		Lifetime [h]	100000	100000	100000
	HO 80 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	55	70
		Lifetime [h]	100000	100000	60000

### Additional product data

<b>Suitable for lamp power (1 lamp)</b>	35...80 W
---	-----------

### Capabilities

<b>Suitable for emergency lighting</b>	Yes
<b>Suitable for fixtures with prot. class</b>	I / II
<b>End of lamp life safety shutdown</b>	EOL T.2
<b>Max. cable length to lamp/LED module</b>	2.0 m / 1.0 m
<b>Dimmable</b>	No

### Certificates & standards


<b>Approval marks – approval</b>	VDE / VDE-EMC / ENEC 10 / CE
<b>EEL – Energy Label</b>	A2 BAT
<b>Standards</b>	Acc. to EN 61347-2-3/Acc. to EN 60929/Acc. to EN 55015:2006 + A1:2007/Acc. to EN 61000-3-2/Acc. to EN 61547
<b>Protection class</b>	II
<b>Type of protection</b>	IP20

### Logistical data

<b>Commodity code</b>	850410809000
-----------------------	--------------

## Wiring Diagram

---

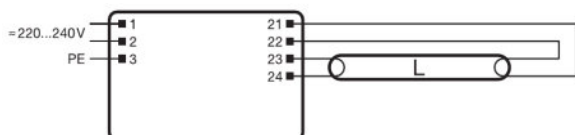











---

Wiring diagram



---

## Download Data

File	
	Addon Technical Information 502689_Frequent switching Quicktronic
	Product Datasheet 502688_ECG lifetime - QUICKTRONIC non DIM
	Certificates 334970_EMC-Marks approval
	Certificates 334971_ENEC-Marks approval
	Certificates 335097_INOTEC
	Certificates 335169_Manufacturer's declaration &#150; LampECG combinations: Frequent switching
	Certificates 592319_EAC certificate for Quicktronics QT
	Certificates 504180_VDE-ENEC-Certificate QTl
	Certificates 504207_VDE-EMC-Certificate QTl
	Declarations of conformity 334809_Declaration of conformity

## Product datasheet

---

	Operating instructions 592500_EAC QT <i>i</i> T5
	CAD data 3-dim 321772_QTi GII
	CAD data 3-dim 321773_QTi GII
	CAD data PDF 321774_QTi GII

---

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321383372	QT <i>i</i> 1X35/49/80 GII	Shipping carton box 20	392 mm x 98 mm x 165 mm	6.34 dm <sup>3</sup>	5019.99 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## QTi 1X35/49/80 GII

QUICKTRONIC INTELLIGENT | ECG for FL 16 mm

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
QTi 1X35/49/80 GII	DULUX L 26 W HE	0.13 A	30.00 W	2600 lm	1
	DULUX L 28 W HE	0.14 A	31.00 W	2700 lm	1
	DULUX L 55 W	0.26 A	59.00 W	4800 lm	1
	DULUX L 80 W	0.38 A	85.00 W	6000 lm	1
	FC 55 W	0.26 A	59.00 W	4200 lm	1
	HE 13 W ES	0.07 A	15.00 W	1150 lm	1
	HE 14 W	0.08 A	16.00 W	1275 lm	1
	HE 19 W ES	0.10 A	22.00 W	1800 lm	1
	HE 21 W	0.11 A	25.00 W	1900 lm	1
	HE 28 W	0.15 A	33.00 W	2700 lm	1
	HE 32 W ES	0.16 A	36.00 W	3150 lm	1
	HE 35 W	0.17 A	38.00 W	3300 lm	1
	HE 35 W XT	0.17 A	38.00 W	3300 lm	1
	HO 45 W ES	0.21 A	48.00 W	4300 lm	1
	HO 49 W	0.24 A	53.00 W	4300 lm	1
	HO 73 W ES	0.34 A	79.00 W	6150 lm	1
	HO 80 W	0.38 A	85.00 W	6150 lm	1

## Product datasheet

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
	HO 80 W XT	0.38 A	85.00 W	6150 lm	1