

Product datasheet

L 18 W/76

OSRAM NATURA T8 | Tubular fluorescent lamps 26 mm, with G13 bases, for food presentation



- /n/r Bakeries, meat processors, butchersnull/n/r Shopsnull/n/r Supermarkets and department storesnull/n/r Especially suitable for the food sector (DIN 10504)null

- /n/r Specially tailored spectral distributionnull/n/r Food looks fresh and appetizing without unduly beautifying itnull
- Product features/n/r Average lifetime: 20,000 h with preheat ECGnull/n/rProduct benefits/n/r Specially tailored spectral distributionnull/n/r Food looks fresh and appetizing without unduly beautifying itnull/n/rAreas of application/n/r Bakeries, meat processors, butchersnull/n/r Shopsnull/n/r Supermarkets and department storesnull/n/r Especially suitable for the food sector (DIN 10504)null/n/rSafety advice/n/rIn case of lamp breakage: www.ledvance.com/brokenlamp/n/r



Product datasheet

Technical data


Electrical data

Nominal voltage	57 V
Nominal wattage	18.00 W
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Rated wattage	18.00 W

Photometrical data

Rated lamp efficacy (standard condition)	42 lm/W
Rated luminous flux	750 lm
Luminous flux at	750 lm
Light color	76
Nominal luminous flux	750 lm
Light color (designation)	NATURA
Rated LLMF at 2,000 h	0.88
Rated LLMF at 4,000 h	0.83
Rated LLMF at 6,000 h	0.80
Rated LLMF at 8,000 h	0.77
Rated LLMF at 12,000 h	0.74
Rated LLMF at 16,000 h	0.72
Color temperature	3500 K
Luminous flux	750 lm

Dimensions & weight

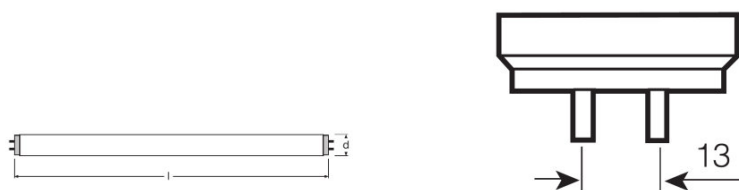

G13
IEC 7004-51
DIN 49653 T1

Tube diameter	26 mm
Length	590.0 mm
Length with base excl. base pins/connection	590.00 mm

Product datasheet

Diameter	26.0 mm
Product weight	85.00 g
Outer bulb	T26
Maximum diameter	26.0 mm

Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------

Lifespan

Service life	18000 h ¹⁾
Lifespan	20000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.90
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Rated lamp life time	20000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	G13
Mercury content	4.5 mg
Appropriate disposal acc. to WEEE	Yes

Capabilities

Suitable for indoor	Yes
---------------------	-----

Certificates & standards


Energy efficiency class	B
Energy consumption	23 kWh/1000h

Country specific categorizations


Order reference	L 18W/76
-----------------	----------

Product datasheet

Light Distribution

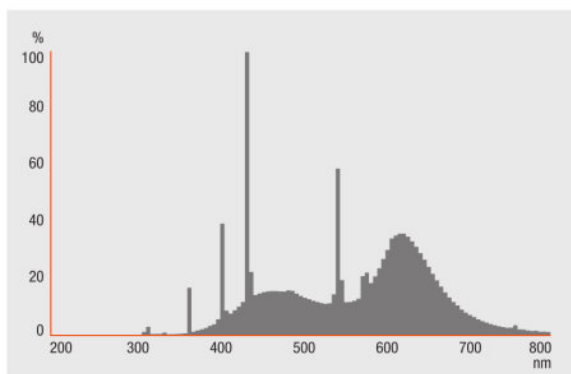

Spectral power distribution

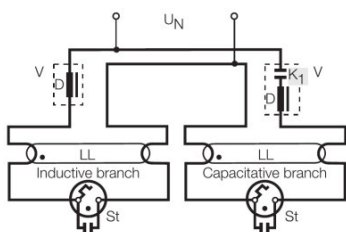

Circuit diagram

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300010519	L 18 W/76	Shipping carton box 10 Pieces Sleeves	510 mm x 210 mm x 145 mm	15.53 dm ³	1140.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product datasheet

References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany