



# MASTERColour CDM-T Evolution

MASTERColour CDM-T Evolution 20W/930 G12

Single-ended, highest-efficiency, longest-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

## Product data

### • General Information

Cap-Base	G12 [ G12]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life To 5% Failures (Nom)	16000 h
Life To 10% Failures (Nom)	18000 h
Life To 20% Failures (Nom)	20000 h
Life To 50% Failures (Nom)	25000 h
Ansi Code HID	C156/E

### • Light Technical

Color Code	930 [ CCT of 3000K]
Luminous Flux (Nom)	2050 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	96 %
Lumen Maintenance 12000 h (Nom)	81 %
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 4000 h (Nom)	89 %
Chromaticity Coordinate X (Nom)	0.435
Chromaticity Coordinate Y (Nom)	0.396
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	102 lm/W
Color Rendering Index (Min)	87

Color Rendering Index (Nom)	90
-----------------------------	----

### • Operating and Electrical

Power (Rated) (Nom)	20.0 W
Lamp Current Run-Up (Max)	0.5 A
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	110 V
Voltage (Min)	100 V
Voltage (Nom)	105 V

### • Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

### • Mechanical and Housing

Bulb Finish	Clear
-------------	-------

### • Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	3.0 mg

### • UV

Pet (Niosh) (Min)	8 h/500lx
-------------------	-----------

**PHILIPS**

Damage Factor D/fc (Max) 0.4

• Luminaire Design Requirements

Bulb Temperature (Max) 250 °C

• Product Data

Full product code 871829165912900


Order product name MASTERColour CDM-T Evolution  
 20W/930 G12  
 EAN/UPC - Product 8718291659129  
 Order code 928064705131  
 Numerator - Quantity Per Pack 1  
 Numerator - Packs per outer box 12  
 Material Nr. (12NC) 928064705131  
 Net Weight (Piece) 0.003 kg  
 ILCOS Code MT/UB-20/930-H-G12-20/90

## Warnings and Safety

- Use only in a totally enclosed luminaire, even during testing (IEC61167, IEC62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- The vast majority of drivers are fully compatible with CDM Evolution lamps. However, best performance is guaranteed with Philips drivers.

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- CDM Evolution lamps are designed to comply with IEC standards
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Dimensional drawing

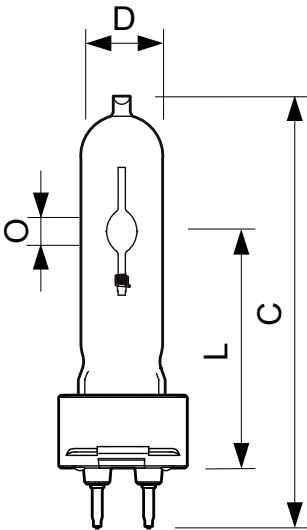


CDM-T Evolution G12


### CDM-T Evol 20W/930 G12

Product	D	O	L	L	L	C
MASTERColour CDM-T Evolution 20W/930 G12	20 mm	3.6 mm	55 mm	57 mm	56 mm	103 mm

## Dimensional drawing



## Photometric data

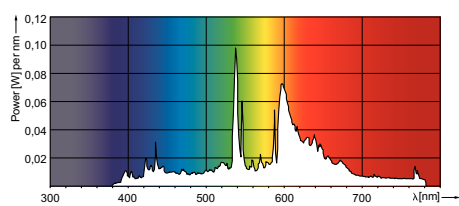

© 2015 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, December 28  
data subject to change