

HID-Constant wattage BSX for SOX

BSX 36 H66 240V 50Hz CW-173/44

Constant-wattage (potted) electromagnetic copper/iron ballasts for use with an external ignitor for SOX and SOX-E lamps

Product data

General Information	
Application Code	H66
Design	CW-173/44
Lamp Type	SOX-E
Number Of Lamps	1 piece/unit
Operating and Electrical	
Input Voltage	230 to 240 V
Input Frequency	50 Hz
Mains Voltage Performance (AC)	-8% - +6%
Mains Voltage Safety (AC)	-10% - +10%
Power Losses (Nom)	10.5 W
Wiring	
Wire Striplength	6.0 mm
Ballast Contact Wire Cross Section	0.75-2.50 mm ²
Connector Type	Screw
System characteristics	
Capacitor	4.4µF/300V
Rated Ballast-Lamp Power	36 W

Recommended Ignitor	ignitor SX72 (913654059066)
Temperature	
T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Winding (Max)	130 °C
Delta-T Normal Conditions	55 °C

Approval and Application


Approval Marks	CE marking ENEC certificate
----------------	-----------------------------

Product Data

Full product code	871150092003499
Order product name	BSX 36 H66 240V 50Hz CW-173/44
EAN/UPC - Product	8711500920034
Order code	913653920526
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913653920526
Net Weight (Piece)	1.700 kg

HID-Constant wattage BSX for SOX

Dimensional drawing

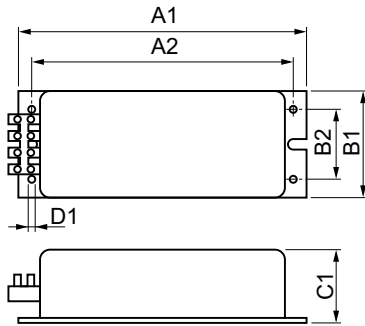

BSX 36 H66 230-240V 50Hz CW-173/44

Product	D1	C1	A1	A2	B1	B2
BSX 36 H66 240V 50Hz CW-173/44	4.2 mm	44.0 mm	173.0 mm	157.0 mm	64.0 mm	42.0 mm

