



# MASTER TL5 High Efficiency

# **MASTER TL5 HE 21W/827 SLV/40**

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

#### **Product data**

General Information	
Cap-Base	G5 [ G5]
Life to 50% Failures Preheat (Nom)	24000 h
Features	na [ Not Applicable]
System Description	High Efficiency
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %
Light Technical	
Color Code	827 [ CCT of 2700K]
Luminous Flux (Nom)	2100 lm
Luminous Flux (Rated) (Nom)	1850 lm
Color Designation	Incandescent White
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	101 lm/W
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	90 lm/W

Color Rendering Index (Max)	85
Color Rendering Index (Min)	80
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Nom)	20.6 W
Lamp Current (Nom)	0.165 A
Temperature	
Design Temperature (Nom)	35 ℃

Datasheet, 2019, December 4 data subject to change


# **MASTER TL5 High Efficiency**

Controls and Dimension				
Controls and Dimming				
Dimmable	Yes			
Mechanical and Housing				
Cap-Base Information	Green Plate			
Approval and Application				
Energy Efficiency Label (EEL)	A+			
Mercury (Hg) Content (Nom)	1.4 mg			
Energy Consumption kWh/1000 h	23 kWh			
Product Data				
Full product code	871150064320955			

Order product name	MASTER TL5 HE 21W/827 SLV/40
EAN/UPC - Product	8711500643209
Order code	927926282755
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927926282755
Net Weight (Piece)	79.200 g
ILCOS Code	FDH-21/27/1B-L/P-G5-16/850


## Warnings and Safety

## Dimensional drawing

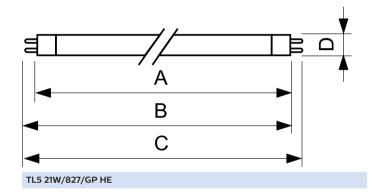


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 21W/827	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm
SI V/40					

#### Photometric data

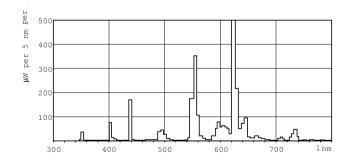




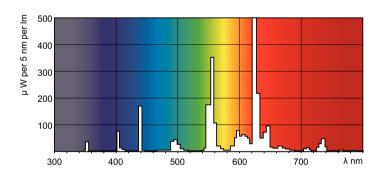


LDPO\_TL5-HE8\_827-Spectral power distribution Colour


# **MASTER TL5 High Efficiency**

#### Lifetime

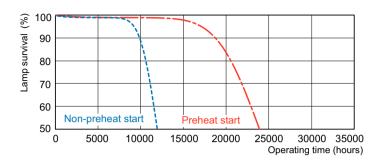



LDLE\_TL5-HE8\_0002-Life expectancy diagram

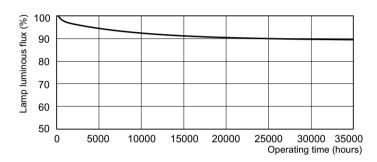



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.