



MASTER TL5 High Output Eco

MASTER TL5 HO Eco 50=54W/830 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HO Eco lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Product data

General Information	
Cap-Base	G5 [G5]
Life to 50% Failures Preheat (Nom)	30000 h
Features	na [Not Applicable]
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	99 %
LSF Preheat 20000 h Rated	94 %
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux (Nom)	5000 lm
Luminous Flux (Rated) (Nom)	4450 lm
Color Designation	Warm White (WW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	102 lm/W
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	93 lm/W

Color Rendering Index (Max)	85
Color Rendering Index (Min)	80
Color Rendering Index (Nom)	85
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Nom)	48 W
Lamp Current (Nom)	0.460 A
Temperature	
Design Temperature (Nom)	35 °C

MASTER TL5 High Output Eco

Controls and Dimming

Dimmable	Yes
----------	-----

Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	54 kWh


Product Data

Full product code	872790082590900
Order product name	MASTER TL5 HO Eco 50=54W/830 UNP/40

EAN/UPC - Product	8711500880048
Order code	927991283031
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927991283031
Net Weight (Piece)	105.800 g
ILCOS Code	FDH-50/30/1B-L/P-G5-16/1150

Warnings and Safety


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Eco 50=54W/830 UNP/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

TL5 HO Eco 50=54W/830

Photometric data

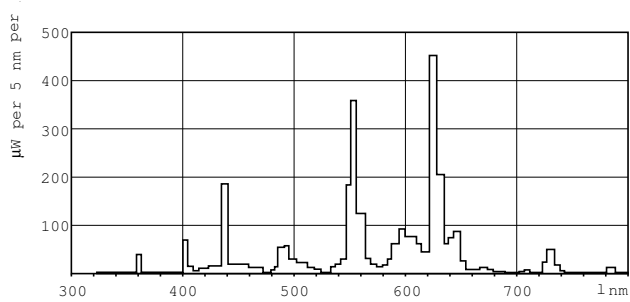


LDPB_TL5ECO_830-Spectral power distribution B/W

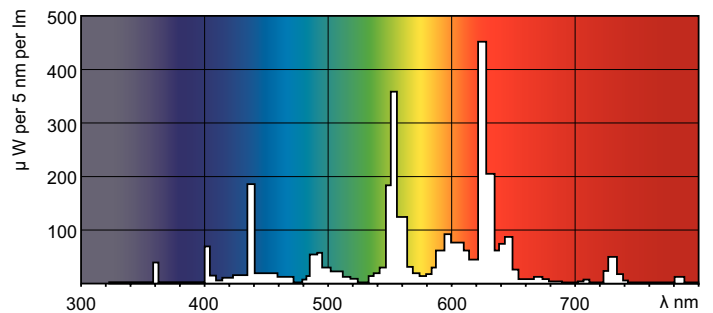


LDPO_TL5ECO_830-Spectral power distribution Colour

MASTER TL5 High Output Eco

Lifetime

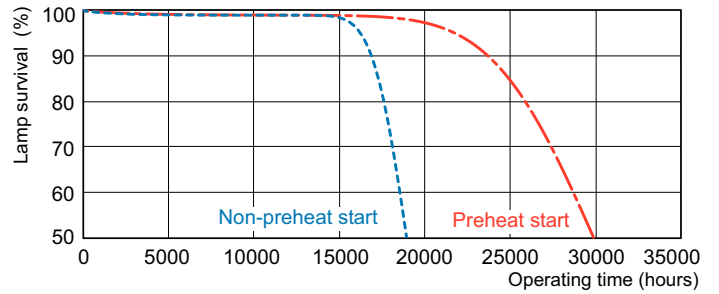

LDLE_TL5ECO_0001-Life expectancy diagram

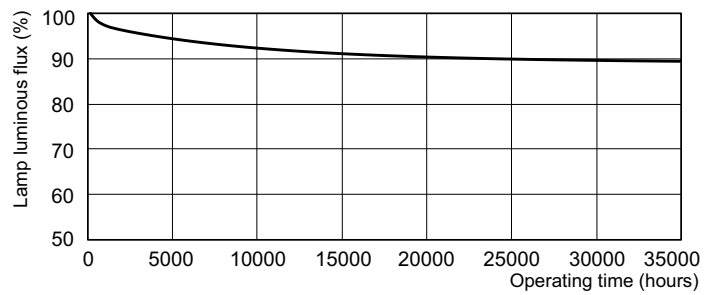

LDLM_TL5ECO_0001-Lumen maintenance diagram

