



CorePro LED candles and lusters

CorePro LEDcandle ND 3.5–25W E14 840 B35 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps, and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters, and are available in either warm white, white or cool daylight color temperatures. LED lamps deliver huge energy savings and minimize maintenance cost. The CorePro LED candles and lusters are perfect for your basic lighting needs. They provide the beautiful light and dependable performance you expect from LED at an affordable price.

Product data

General Information		Operating and Electrical	
Cap-Base	E14 [E14]	Input Frequency	50 to 60 Hz
EU RoHS compliant	Yes	Power (Nom)	3.5 W
Nominal Lifetime (Nom)	15000 h	Lamp Current (Nom)	35 mA
Switching Cycle	50000X	Wattage Equivalent	25 W
Technical Type	3.5-25W	Starting Time (Nom)	0.5 s
		Warm Up Time to 60% Light (Nom)	0.5 s
		Power Factor (Nom)	0.4
		Voltage (Nom)	220-240 V
Light Technical		Temperature	
Color Code	840 [CCT of 4000K]	T-Case Maximum (Nom)	75 °C
Luminous Flux (Nom)	290 lm		
Color Designation	Cool White (CW)	Controls and Dimming	
Correlated Color Temperature (Nom)	4000 K	Dimmable	No
Luminous Efficacy (rated) (Nom)	82.86 lm/W		
Color Consistency	<6		
Color Rendering Index (Nom)	80		
LLMF At End Of Nominal Lifetime (Nom)	70 %		

CorePro LED candles and lusters

Mechanical and Housing

Bulb Finish Frosted

Approval and Application

Energy Efficiency Label (EEL) A+

Energy Consumption kWh/1000 h 4 kWh

Product Data

Full product code 871869654348100

Order product name CorePro LEDcandle ND 3.5-25W E14 840 B35
FR

EAN/UPC - Product 8718696543481

Order code 929001205602


Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 10

Material Nr. (12NC) 929001205602

Net Weight (Piece) 0.040 kg


Dimensional drawing




LED ND 3.5-25W E14 840 B35 FR

Product	D	C
CorePro LEDcandle ND 3.5-25W E14 840 B35 FR	35 mm	106 mm

Photometric data

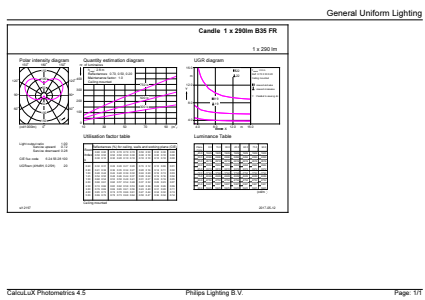


CorePro LEDcandle 25W E14 840 FR B35



CorePro LEDcandle 25W E14 840 FR B35

CorePro LED candles and lusters

Photometric data

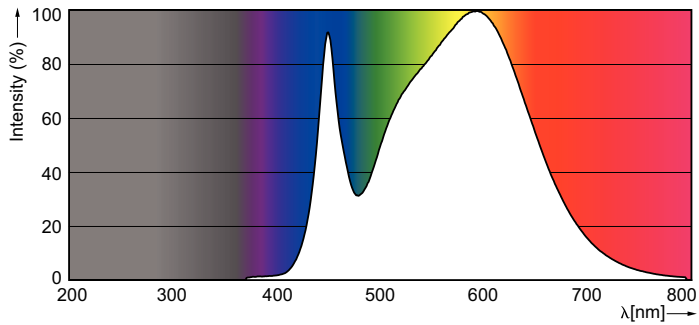

SDPO_LEDCL_0005-Spectral Power distribution

Lifetime



LEDbulb 60W E14 827 FR B38



LEDbulb 60W E14 827 FR B38

